


Pulse Proof Thick Film Chip Resistors



FEATURES

- High pulse performance
- Stability $\Delta R/R \leq 1\%$ for 1000 h at 70 °C
- Pure tin solder contacts on Ni barrier layer provides compatibility with lead (Pb)-free and lead containing soldering processes
- Metal glaze on high quality ceramic
- Compliant to RoHS Directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition
- AEC-Q200 qualified



RoHS
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	CASE SIZE	SIZE METRIC	POWER RATING $P_{70\text{ }^{\circ}\text{C}}$ W	LIMITING ELEMENT VOLTAGE $U_{\text{max. AC/DC}}$	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	SERIES
D10/CRCW0402-IF	0402	RR 1005M	0.063	50	± 200	$\pm 5, \pm 10$	1R0 to 100K	E24
D11/CRCW0603-IF	0603	RR 1608M	0.10	75	± 200	$\pm 5, \pm 10$	1R0 to 100K	E24
D12/CRCW0805-IF	0805	RR 2012M	0.125	150	± 200	$\pm 5, \pm 10$	1R0 to 100K	E24
D25/CRCW1206-IF	1206	RR 3216M	0.25	200	± 200	$\pm 5, \pm 10$	1R0 to 100K	E24
CRCW1210-IF	1210	RR 3225M	0.50	200	± 200	$\pm 5, \pm 10$	1R0 to 100K	E24

Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.
- Marking: See data sheet "Surface Mount Resistor Marking" (document number 20020).
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	D10/CRCW0402-IF	D11/CRCW0603-IF	D12/CRCW0805-IF	D25/CRCW1206-IF	CRCW1210-IF
Power rating P_{70} ⁽¹⁾	W	0.063	0.1	0.125	0.25	0.5
Limiting element voltage $U_{\text{max. AC/DC}}$	V	50	75	150	200	200
Insulation voltage U_{ins} (1 min)	V	> 75	> 100	> 200	> 300	> 300
Insulation resistance	Ω	> 10^9				
Operating temperature range	$^{\circ}\text{C}$	- 55 to +155				
Failure rate	h^{-1}	< 0.1×10^{-9}				
Weight	mg	0.65	2	5.5	10	16

Note

- ⁽¹⁾ The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printe-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.

PART NUMBER AND PRODUCT DESCRIPTION

Part Number: CRCW08051R00JNEAIF

C	R	C	W	0	8	0	5	1	R	0	0	J	N	E	A	I	F
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

MODEL	RESISTANCE	TOLERANCE	TCR	PACKAGING	SPECIAL
CRCW0402 CRCW0603 CRCW0805 CRCW1206 CRCW1210	R = Decimal K = Thousand	J = $\pm 5\%$ K = $\pm 10\%$	N = ± 200 ppm/K	EA EB EC ED	Up to 2 digits IF = Pulse proof


Product Description: D12/CRCW0805-IF 200 1R0 5 % ET1 e3

D12/CRCW0805-IF	200	1R0	5 %	ET1	e3
MODEL	TCR	RESISTANCE	TOLERANCE	PACKAGING	LEAD (Pb)-FREE
D10/CRCW0402-IF D11/CRCW0603-IF D12/CRCW0805-IF D25/CRCW1206-IF CRCW1210-IF	± 200 ppm/K	1R0 = 1 Ω 10K = 10 k Ω	$\pm 5\%$ $\pm 10\%$	ET1 ET5 ET6 ET7	e3 = Pure tin termination finish

PACKAGING

MODEL	UNIT	PAPER TAPE ON REEL ACC. TO IEC 60286-3, TYPE I		
		QUANTITY	PART NUMBER	PRODUCT DESCRIPTION
D10/CRCW0402-IF	180 mm/7"	10 000	ED	ET7
	330 mm/13"	50 000	EE	EF4
D11/CRCW0603-IF	180 mm/7"	5000	EA	ET1
	285 mm/11.25"	10 000	EB	ET5
	330 mm/13"	20 000	EC	ET6
D12/CRCW0805-IF	180 mm/7"	5000	EA	ET1
	285 mm/11.25"	10 000	EB	ET5
	330 mm/13"	20 000	EC	ET6
D25/CRCW1206-IF	180 mm/7"	5000	EA	ET1
	285 mm/11.25"	10 000	EB	ET5
	330 mm/13"	20 000	EC	ET6
CRCW1210-IF	180 mm/7"	5000	EA	ET1
	285 mm/11.25"	10 000	EB	ET5
	330 mm/13"	20 000	EC	ET6


DIMENSIONS

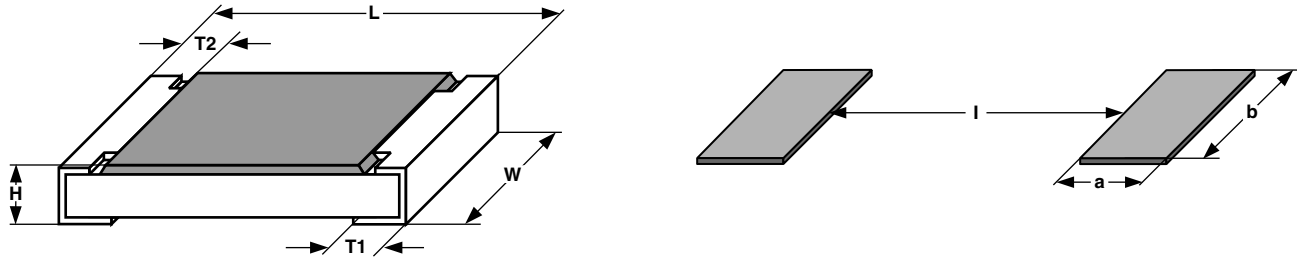

SIZE		DIMENSIONS in millimeters					SOLDER PAD DIMENSIONS in millimeters					
							REFLOW SOLDERING			WAVE SOLDERING		
INCH	METRIC	L	W	H	T1	T2	a	b	l	a	b	l
0402	1005	1.0 ± 0.05	0.5 ± 0.05	0.35 ± 0.05	0.25 ± 0.05	0.2 ± 0.1	0.4	0.6	0.5			
0603	1608	1.55 ^{+0.10} _{-0.05}	0.85 ± 0.1	0.45 ± 0.05	0.3 ± 0.2	0.3 ± 0.2	0.5	0.9	1.0	0.9	0.9	1.0
0805	2012	2.0 ^{+0.10} _{-0.20}	1.25 ± 0.15	0.45 ± 0.05	0.3 ± 0.2	0.3 ± 0.2	0.7	1.3	1.2	0.9	1.3	1.3
1206	3216	3.2 ^{+0.10} _{-0.20}	1.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	1.7	2.0	1.1	1.7	2.3
1210	3225	3.2 ± 0.2	2.5 ± 0.2	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	2.5	2.0	1.1	2.5	2.2


FUNCTIONAL PERFORMANCE

Maximum pulse dissipation as a function of the pulse duration,
single pulse

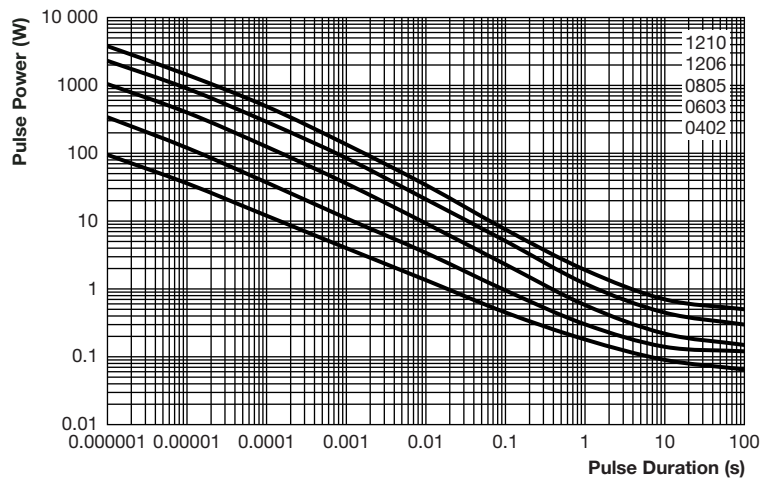



Maximum pulse load, single pulse; applicable if $\bar{P} \rightarrow 0$ and $n \leq 1000$ and $\dot{U} \leq \dot{U}_{max}$;
for permissible resistance change equivalent to 8000 h operation

Maximum pulse dissipation as a function of the pulse duration, continuous pulse loading

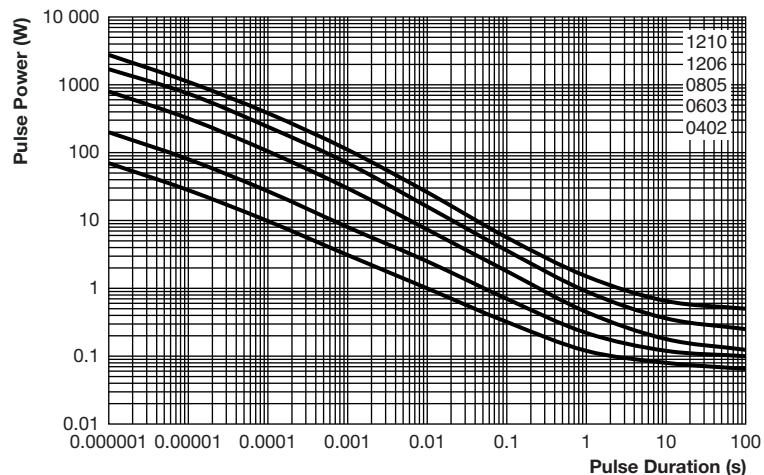


Maximum pulse dissipation as a function of the pulse duration, single pulse

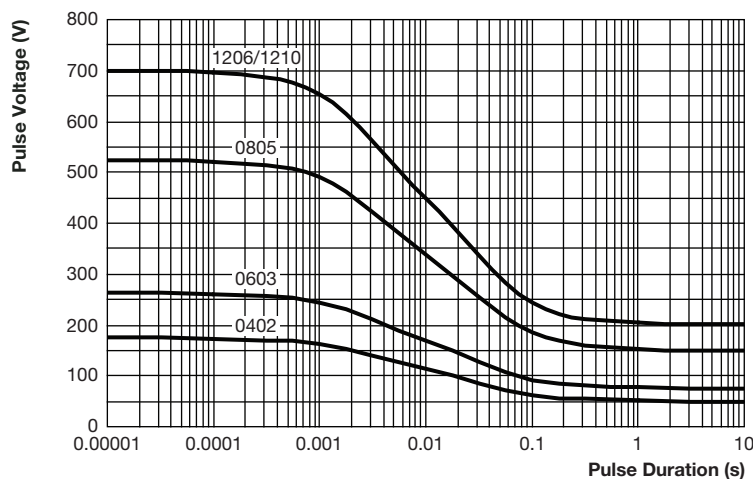

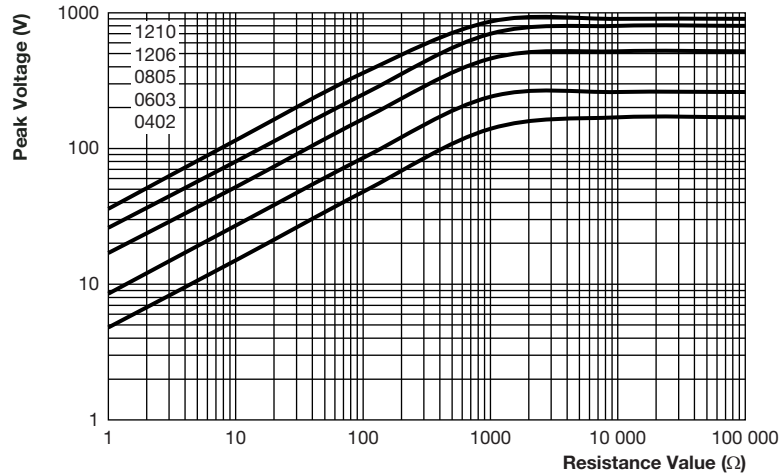
Single-pulse high voltage overload test 1.2 μ s/50 μ s EN 140000 4.27


Pulse load rating in accordance to EN 60115-1, 4.27; 1.2 μ s/50 μ s;
5 pulses at 12 s intervals; for permissible resistance change 1 %

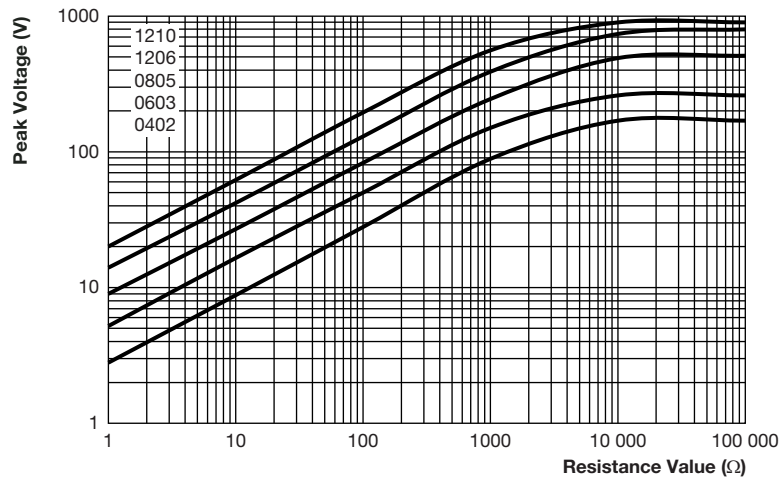Single-pulse high voltage overload test 10 μ s/700 μ s EN 140000 4.27


Pulse load rating in accordance to EN 60115-1, 4.27; 10 μ s/700 μ s;
10 pulses at 1 min intervals; for permissible resistance change 1 %

Derating

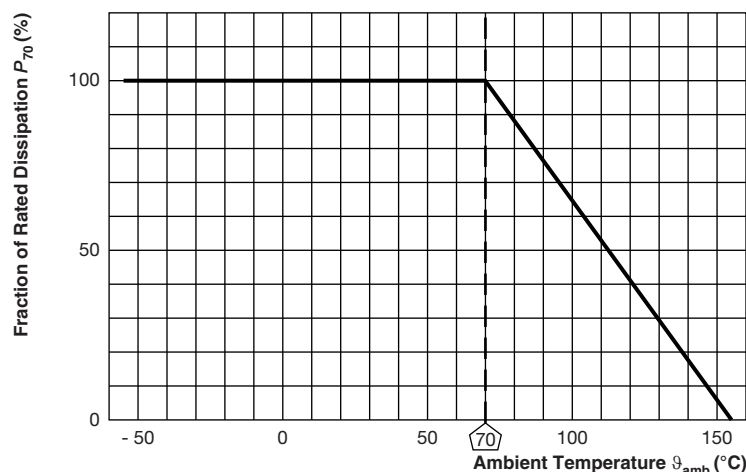

TEST PROCEDURES AND REQUIREMENTS

EN 60115-1 CLAUSE	IEC 60082-2 TEST METHOD	TEST	PROCEDURE	RWQUIREMENTS PERMISSIBLE CHANGE (ΔR)
			Stability for product type:	STABILITY CLASS 1 OR BETTER
			D/CRCW-IF e3	1 Ω to 100 k Ω
4.5	-	Resistance	-	$\pm 5\%$; $\pm 10\%$
4.7	-	Voltage proof	$U = 1.4 \times U_{ins}$; 60 s	No flashover or breakdown
4.13	-	Short time overload	$U = 2.5 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max.}$; duration acc. to style	$\pm (0.25\% R + 0.05 \Omega)$
4.17.2	58 (Td)	Solderability	Solder bath method; Sn60Pb40; non-activated flux; (235 $\pm$ 5) °C, (2 $\pm$ 0.2) s	Good tinning ($\geq 95\%$ covered); no visible damage
			Solder bath method; Sn96.5Ag3Cu0.5; non-activated flux; (245 $\pm$ 5) °C, (3 $\pm$ 0.3) s	Good tinning ($\geq 95\%$ covered); no visible damage
4.8.4.2	-	Temperature coefficient	(20/- 55/20) °C and (20/125/20) °C	± 200 ppm/K
4.19	14 (Na)	Rapid change of temperature	30 min. at - 55 °C; 30 min. at 125°C 5 cycles 1000 cycles	$\pm (0.25\% R + 0.05 \Omega)$ $\pm (1\% R + 0.05 \Omega)$

TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60082-2 TEST METHOD	TEST	PROCEDURE	RWQUIREMENTS PERMISSIBLE CHANGE (ΔR)
			Stability for product type:	STABILITY CLASS 1 OR BETTER
			D/CRCW-IF e3	1 Ω to 100 k Ω
4.23	-	Climatic sequence:	-	$\pm (1 \% R + 0.05 \Omega)$
4.23.2	2 (Ba)	Dry heat	125 °C; 16 h	
4.23.3	30 (Db)	Damp heat, cyclic	55 °C; $\geq 90 \% RH$; 24 h; 1 cycle	
4.23.4	1 (Aa)	Cold	- 55 °C; 2 h	
4.23.5	13 (M)	Low air pressure	1 kPa; (25 $\pm$ 10) °C; 1 h	
4.23.6	30 (Db)	Damp heat, cyclic	55 °C; $\geq 90 \% RH$; 24 h; 5 cycles	
4.23.7	-	DC load	$U = \sqrt{P_{70} \times R}$	
4.25.1	-	Endurance at 70 °C	$U = \sqrt{P_{70} \times R} \leq U_{max}$. 1.5 h on; 0.5 h off; 70 °C; 1000 h 70 °C; 8000 h	$\pm (1 \% R + 0.05 \Omega)$ $\pm (2 \% R + 0.1 \Omega)$
4.18.2	58 (Td)	Resistance to soldering heat	Solder bath method (260 $\pm$ 5) °C; (10 $\pm$ 1) s	$\pm (0.25 \% R + 0.05 \Omega)$
4.24	78 (Cab)	Damp heat, steady state	(40 $\pm$ 2) °C; (93 $\pm$ 3) % RH; 56 days	$\pm (1 \% R + 0.05 \Omega)$
4.25.3	-	Endurance at upper category temperature	155 °C; 1000 h	$\pm (1 \% R + 0.05 \Omega)$
4.27	-	Single pulse high voltage overload, 10 μs /700 μs	$\hat{U} = 10 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max}$; 10 pulses	$\pm (1 \% R + 0.05 \Omega)$

All tests are carried out in accordance with the following specifications:

- EN 60115-1, generic specification
- EN 140400, sectional specification
- EN 140401-802, detail specification
- IEC 60068-2-x, environmental test procedures

Packaging of components is done in paper or blister tapes according to IEC 60286-3.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

CRCW080510R0JNEAIF	CRCW08051R00JNEAIF	CRCW080520R0JNEAIF	CRCW080522R0JNEAIF
CRCW080527R0JNEAIF	CRCW08052R20JNEAIF	CRCW08054R70JNEAIF	CRCW080556R0JNEAIF
CRCW1206100RJNEAIF	CRCW120610R0KNEAIF	CRCW12061K00JNEAIF	CRCW12061K00KNEAIF
CRCW12061K10JNEAIF	CRCW12061R00JNEAIF	CRCW120620R0JNEAIF	CRCW1206220RJNEAIF
CRCW12062R00JNEAIF	CRCW120630R0KNEAIF	CRCW12063R00KNEAIF	CRCW12063R30KNEAIF
CRCW120660R0KNEAIF	CRCW1206120RJNEAIF	CRCW1206200RJNEAIF	CRCW120610R0JNEAIF
CRCW120647R0JNEAIF	CRCW120615K0JNEAIF	CRCW080522K0JNEAIF	CRCW120620K0JNEAIF
CRCW120622R0JNEAIF	CRCW1206390RJNEAIF	CRCW12061K20JNEAIF	CRCW12064R70JNEAIF
CRCW080539R0JNEAIF	CRCW120656R0JNEAIF	CRCW1206270RJNEAIF	CRCW1206430RJNEAIF
CRCW120618R0JNEAIF	CRCW040210R0KNEDIF	CRCW04024K70JNEDIF	CRCW0603100RJNEAIF
CRCW0603180RJNEAIF	CRCW0603390RJNEAIF	CRCW0603470RJNEAIF	CRCW0805100RKNEAIF
CRCW080510R0KNEAIF	CRCW080512R0JNEAIF	CRCW080512R0KNEAIF	CRCW08051K50JNEAIF
CRCW08051R20JNEAIF	CRCW0805200RKNEAIF	CRCW08053K30KNEAIF	CRCW08053K30KNEBIF
CRCW08053K30KNECIF	CRCW08053R00JNEAIF	CRCW080551R0JNEAIF	CRCW0805820RJNEAIF
CRCW0805820RKNEAIF	CRCW1206100RKNEAIF	CRCW120612R0JNEAIF	CRCW120613R0JNEAIF
CRCW120615R0JNEAIF	CRCW120616R0JNEAIF	CRCW12061K50JNEAIF	CRCW12061R20JNEAIF
CRCW12061R30JNEAIF	CRCW1206200RKNEAIF	CRCW120620R0KNEAIF	CRCW12062K00JNEAIF
CRCW12062R20JNEAIF	CRCW1206300RJNEAIF	CRCW120639R0JNEAIF	CRCW12063R00JNEAIF
CRCW12063R30JNEAIF	CRCW1206470RJNEAIF	CRCW12064K70JNEAIF	CRCW1206510RJNEAIF
CRCW120651K0JNEAIF	CRCW120651R0KNEAIF	CRCW12065R60JNEAIF	CRCW1206680RJNEAIF
CRCW12066K20JNEAIF	CRCW12066K80JNEAIF	CRCW12066R80JNEAIF	CRCW120675R0JNEAIF
CRCW120682R0JNEAIF	CRCW12068R20JNEAIF	CRCW06034K70JNEAIF	CRCW06031R00JNEAIF
CRCW1206150RJNEAIF	CRCW12062R70JNEAIF	CRCW04021R00JNEDIF	CRCW08056R80JNEAIF
CRCW0603100KJNEAIF	CRCW08053R30JNEAIF	CRCW0805100RJNEAIF	CRCW040210K0JNEDIF