


1.4kW Single-Phase Switched PDU with LX Platform Interface, 120V Outlets (16 5-15R), 10 ft. (3.05 m) Cord with 5-15P, 0U, TAA

MODEL NUMBER: PDUMV15NETLX

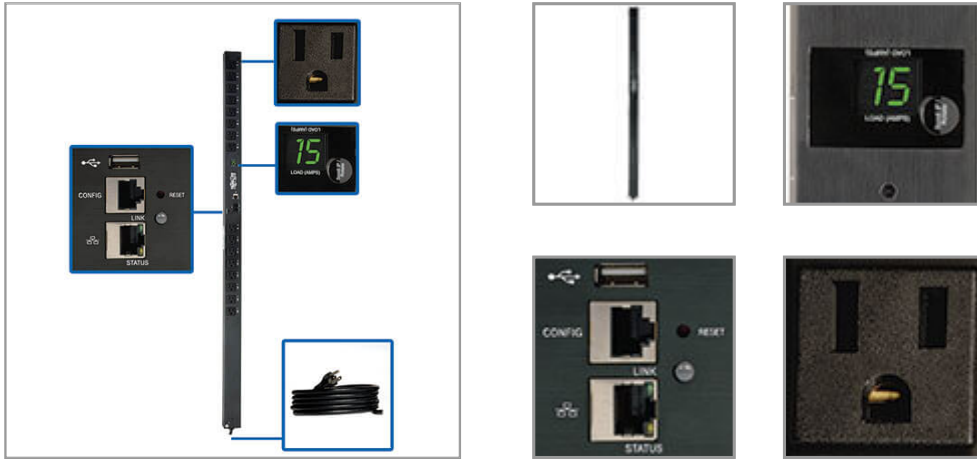

1.4kW vertical PDU distributes, monitors and manages single-phase power in an IT environment with no Java required. Built-in network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

Description

The PDUMV15NETLX 1.4kW Single-Phase Switched PDU provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. Recommended for IT and industrial applications, the vertical PDU features 16 switched NEMA 5-15R outlets with included cord retention brackets to prevent cables from becoming accidentally disconnected. A 10-ft. (3.05 m) cord with NEMA 5-15P plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A digital ammeter allows you to monitor the total load in real time to ensure it remains well below maximum capacity with no danger of overload. The vertical PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

Features

Highlights

- 1.4kW 120V single-phase switched 0U PDU
- 16 individually controllable NEMA 5-15R outlets
- Built-in LX Platform interface for 24/7 remote access
- Auto Probe for Autonomous Device Management
- Digital ammeter for on-site load monitoring in real time
- NEMA 5-15P input with 10-ft. (3.05 m) AC power cord
- To enable the Auto Probe feature, this product requires LX firmware update 15.5.2 or later to be installed

Package Includes

- PDUMV15NETLX 1.4kW Single-Phase Switched PDU
- Built-in LX Platform interface
- Configuration cable
- (16) Cable ties
- (2) Cord retention brackets
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Distributes Network-Grade AC Power 1.4kW 120V switched PDU with single-phase input Recommended for network applications requiring individual outlet control, load shedding and remote monitoring of critical network components NEMA 5-15P plug with 10-ft. (3.05 m) cord connects to compatible AC power source Firmware upgrades support future product enhancements

16 Switched NEMA 5-15R Outlets Distribute AC Power Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Cord retention brackets prevent cables from becoming accidentally disconnected

Digital Ammeter Reports total PDU load in real time Supports IP-address self-ID Rotates 180° for easy reading at either angle

Built-In LX Platform Interface Allows full remote access for power monitoring with email notifications via secure web browser, SNMP, telnet or SSH Supports 10/100 Mbps auto-sensing for communication with an Ethernet network Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities No Java required

Broad Communications Compatibility Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP Supports automatic and manual assignment of IP address

Reduce Service Calls with Auto Probe Autonomous Device Management The Auto Probe feature (Firmware 15.5.2 and greater) checks the connectivity status of any networked device and automatically takes one or more user-configured actions if the device fails to respond; actions include outlet reboot, set SNMP traps, SNMP OID sets, and even script execution when used in conjunction with the Tripp Lite PowerAlert Network Shutdown Agent (PANSA)

Easy 0U Installation in EIA-Standard 19 in. Racks Vertical PDU mounts using included toolless buttons or rack-mounting brackets Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

OVERVIEW	
UPC Code	037332205193
PDU Type	Switched
INPUT	
PDU Input Voltage	100; 120; 127
Recommended Electrical Service	15A 120V
Maximum Input Amps	15
Maximum Input Amps Details	Agency de-rated to 12A continuous
PDU Plug Type	NEMA 5-15P
Input Phase	Single-Phase
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	1.52kW (127V), 1.44kW (120V), 1.2kW (100V) / 15A total capacity (Agency de-rated to 12A); 12A max per outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(16) 5-15R
Output Nominal Voltage	100; 120; 127
Overload Protection	n/a



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Customized Load Management Receptacles	16 individually switched output receptacles
USER INTERFACE, ALERTS & CONTROLS	
Front Panel LCD Display	Digital LED display reports total PDU output current in amps
Front Panel LEDs	16 LEDs display power on-off status for each output receptacle; Network Link/Activity Status LED (Yellow), Network Speed LED (Green); LX Platform status LED (Green)
Switches	Pushbutton control supports 180 degree Display Rotation and Scroll IP address functions; LX Platform Interface: Recessed reset switch for interface reboot and factory reset
PHYSICAL	
Form Factors Supported	0U vertical rackmount. Includes mounting brackets. Supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	10.16 x 15.24 x 131.44
Shipping Dimensions (hwd / in.)	4.00 x 6.00 x 51.75
Shipping Weight (kg)	4.99
Shipping Weight (lbs.)	11.00
Unit Dimensions (hwd / cm)	124.5 x 5.6 x 6.7
Unit Dimensions (hwd / in.)	49 x 2.19 x 2.65
Unit Weight (kg)	3.18
Unit Weight (lbs.)	7
ENVIRONMENTAL	
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5-95% non-condensing
COMMUNICATIONS	
Network Monitoring Port	RJ45 Network port, RJ45 Console port; USB A supports a variety of Envirosense2 environmental monitoring and control options. See Accessories>Management Hardware section for more information about these modules.
SNMP Compatibility	Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, Telnet, SSH, CLI and SNMP management systems
SPECIAL FEATURES	
High Availability PDU Features	Auto Probe Monitoring and Reboot (included)
STANDARDS & COMPLIANCE	
Certifications	Tested to UL60950-1: 2007 (USA), CAN/CSA-C22.2 NO. 60950-1-07 (Canada), FCC Class A Part 15 (Emissions), NOM (Mexico), RoHS Compliant, TAA Compliant
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:
<https://www.tripplite.com/products/product-certification-agencies>