


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A (MAX)	W $\pm .010$	C (MIN)	M $\pm .02$	H $\pm .010$
P22-2R	#2	.52 (13.20)	.205 (5.20)	.16 (4.06)	.42 (10.67)	.092 (2.34)
P22-4R	#4	.52 (13.20)	.205 (5.20)	.16 (4.06)	.42 (10.67)	.132 (3.35)
P22-6R	#6	.52 (13.20)	.205 (5.20)	.16 (4.06)	.42 (10.67)	.152 (3.86)
P22-8R	#8	.63 (16.00)	.260 (6.60)	.25 (6.35)	.50 (12.70)	.175 (4.45)
P22-10R	#10	.63 (16.00)	.315 (8.00)	.22 (5.59)	.47 (11.93)	.215 (5.46)

NOTES:

1. RECOMMENDED FOR #26-22 SOLID OR STRANDED COPPER WIRE
2. MATERIAL:
A. STAMPING - .020 (0.51) THK COPPER, TIN PLATED
3. PACKAGE QTY: STD. PKG. -C=100
BULK PKG. -M=1000
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS: CT-100 (PKT B), CT-200
6. WIRE STRIP LENGTH: $3/16 \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ (4.8 $\begin{smallmatrix} +.8 \\ -.0 \end{smallmatrix}$)

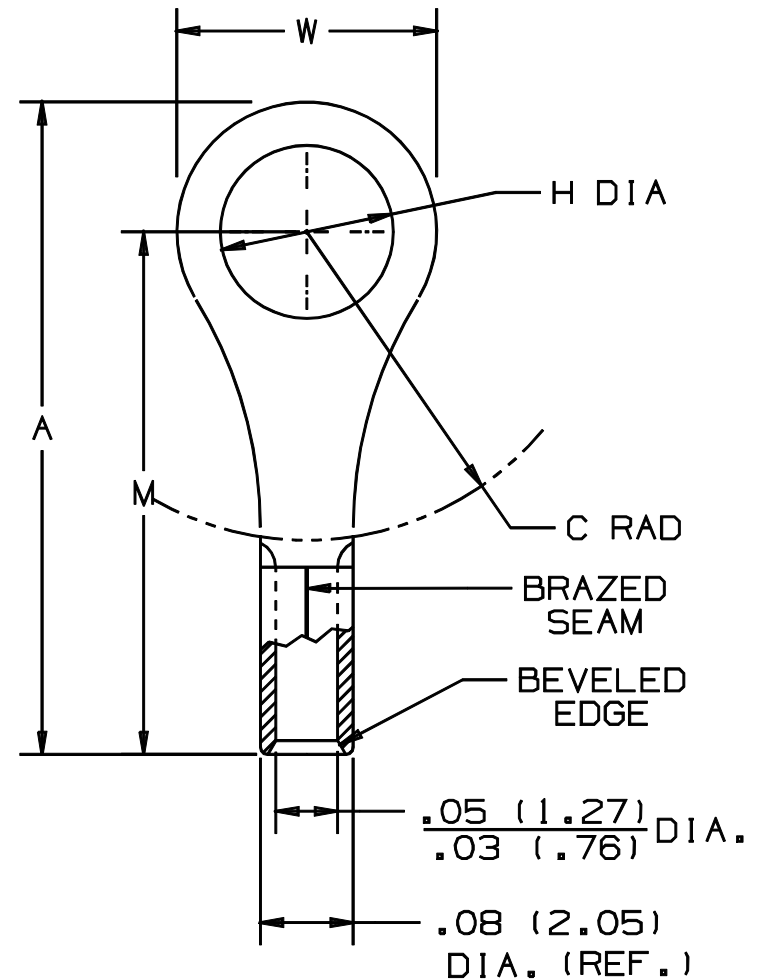

A41227_05

05	1/01	KMD		CAD FILE SPEC. WAS N41227AA_PCD_04				PANDUIT CORP TINLEY PARK, ILLINOIS
04	9-96	JB		UPDATE DIMENSIONS	05029			
03	8-95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03539	KRS	LA	#26-22 BARREL NON-INSULATED RING TONGUE
02	7-88	DW		REDRAWN WITH REVISIONS		JB		
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	CUST	DRAWN BY DAW CHK'D RLS SCALE NONE DRAWING NO. A41227

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[P22-4R-M](#) [P22-8R-M](#)