


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0873400696](#)
Status: **Active**
Overview: Milli-Grid™ Connector System
Description: 2.00mm Pitch Milli-Grid™ Receptacle, Surface Mount (Very Low Profile), Top Entry, with Locating Pegs, with Pick-and-Place Cap, 0.38µm Gold (Au) Plating, 6 Circuits, Lead-Free, Embossed Tape on Reel

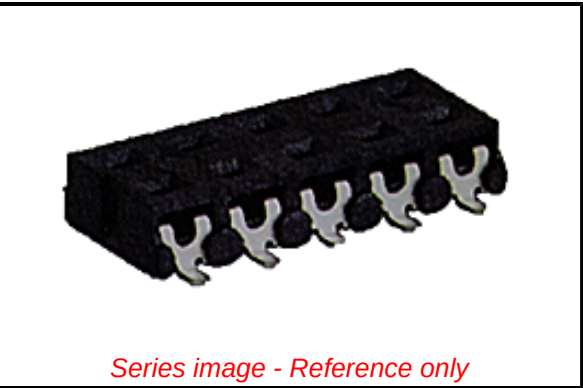

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Packaging Specification PK-87368-0001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)
[Product Literature \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Receptacles
Series	87340
Application	Board-to-Board, Signal
Overview	Milli-Grid™ Connector System
Product Literature Order No	987650-1991
Product Name	Milli-Grid™
UPC	822348893942
Physical	
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.077/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Robotic Placement	Pick and Place Cap
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	1.0A
Voltage - Maximum	125V

Solder Process Data

EU ELV
Not Relevant

EU RoHS
Compliant
REACH SVHC
Not Contained Per -
ED/21/2016 (20 June
2016)
Halogen-Free
Status
Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[87340](#) Series

Mates With
[87759](#) Vertical, Surface Mount, Stackable PCB Headers, [87760](#) Right Angle, Through Hole, Stackable PCB Headers, [87758](#) Vertical, Through Hole, Stackable PCB Headers

Duration at Max. Process Temperature (seconds)	014
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-87368-0001
Sales Drawing	SD-87340-**92

This document was generated on 01/12/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION