


domestic fuse carriers

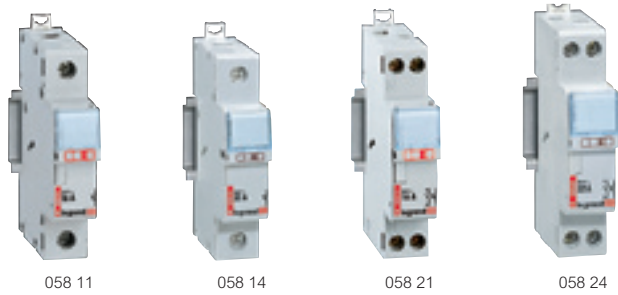

Dimensions (p. 183)

With label-holders
With insulated carrier class II, padlockable
Coupling via supply busbars
Shielded terminals capacity 2 x 10 mm²
Possibility to signal indicator blown fuse
Fuse not supplied

Pack	Cat.Nos	For domestic cylindrical cartridge fuses		
		Conform to EN 60269-1 and IEC 60269-1,3		
		Single pole		
		For domestic cartridges	Cartridge dimensions (mm)	Number of modules
10	058 10	10 A - 230 V~	8.5 x 23	1
10	058 11	16 A	10.3 x 25.8	1
10	058 12	20 A - 400 V~	8.5 x 31.5	1
10	058 13	25 A	10.3 x 31.5	1
10	058 14	32 A	10.3 x 38	1
		Single pole + neutral		
10	058 20	10 A - 230 V~	8.5 x 23	1
10	058 21	16 A	10.3 x 25.8	1
10	058 22	20 A - 400 V~	8.5 x 31.5	1
10	058 23	25 A	10.3 x 31.5	1
10	058 24	32 A	10.3 x 38	1

Pack	Cat.Nos	For miniature cylindrical cartridge fuses		
		Conform to EN 60127-6 and IEC 60127-6 To protect sensitive equipment: transformers, electronic equipment, etc.		
		Single pole		
		Cartridge dimensions (mm)	Voltage	Number of modules
5	058 00	5 x 20	250 V~	1
		Single pole + neutral		
5	058 02	5 x 20	250 V~	1

Supply busbars (p. 249)

domestic cartridge fuses



Pack	Cat.Nos	Miniature type 5 x 20		
		Instant reaction fuse - Ceramic body Conform to EN/IEC 60127-2 High rupture capacity (A) For use with dimmers, Viking terminal blocks and emergency lightning units, transformers		
		Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)
10	102 02	0.2	250	1500
10	102 05	0.5		
10	102 06	0.63		
10	102 10	1		
10	102 20	2		
10	102 30	3.15		
10	102 50	5		
10	102 63	6.3		
10	102 96 ⁽¹⁾	10		
10				

Pack	Cat.Nos	Cylindrical				
		6.3 x 23				
		Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps) Copper	Protected section (mm ²)	Color Indication
10	Without indicator 103 06 ⁽²⁾	6	230	6000	1.5	
		8.5 x 23				
10	113 10	6	230	6000	1.5	Yellow
		10.3 x 25.8				
10	116 10 ⁽²⁾	10	230	6000	2.5	Red
10	116 16 ⁽²⁾	16				
		8.5 x 31.5				
10/100	123 20	20	400	20000	2.5	Green
		10.3 x 31.5				
10	126 16	16	400	20000	4	Blue
10	126 20	20				
10	126 25	25				
		10.3 x 38				
10/100	133 32	32	400	20000	6	Brown
10	134 32	32				

Pack	Cat.Nos	Neutral links
10	123 00	8 x 32 (previously 8.5 x 31.5)
10	133 00	10 x 38

Other cartridge fuses (p. 132)