

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705550009

Status:

Active

Overview:

SL™ Modular Connectors

Description:

2.54mm Pitch SL™ Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 10 Circuits, Tin (Sn) Plating

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-70400 \(PDF\)](#)
- [Product Specification PS-70541 \(PDF\)](#)
- [Test Summary TS-70541-001 \(PDF\)](#)
- [Test Summary TS-70541-100 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

70555

Application

Signal, Wire-to-Board

Overview

SL™ Modular Connectors

Product Name

SL™

UPC

800753623958

Physical

Breakaway

No

Circuits (Loaded)

10

Circuits (maximum)

10

Color - Resin

Black

Durability (mating cycles max)

25

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

Yes

Lock to Mating Part

Yes

Material - Metal

Brass, Phosphor Bronze

Material - Plating Mating

Tin

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

2.243/g

Number of Rows

1

Orientation

Right Angle

PC Tail Length

3.30mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.60mm

Packaging Type

Tube

Pitch - Mating Interface

2.54mm

Plating min - Mating

3.810µm

Plating min - Termination

3.810µm

Polarized to Mating Part

Yes

Shrouded

Fully

Stackable

No

Temperature Range - Operating

-40°C to +105°C


Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

3.0A

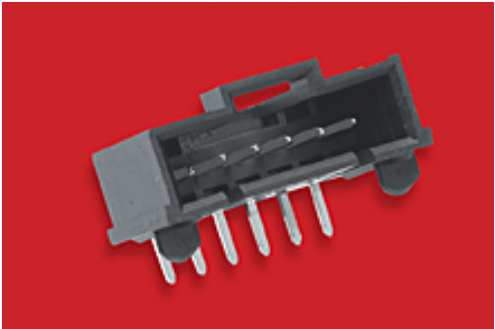

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Contains SVHC(2015 June 15): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

70555 Series

Mates With

SL™ Crimp Housing [70066](#) Option N, [70066](#) Option G, [70430](#) Option G, [70400](#) Option G

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245
Material Info	
Old Part Number	A-70555-0009
Reference - Drawing Numbers	
Product Specification	PS-70400, PS-70541
Sales Drawing	SDA-70555-****
Test Summary	TS-70541-001, TS-70541-100

This document was generated on 10/30/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION