

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0740591014

Status:


Active

Overview:

VHDM® Backplane Connector Systems

Description:

VHDM® Single-Ended Board-to-Board Backplane Header, 2.00mm Pitch, Vertical, 6-Rows, Guide Pin Signal Module, Shield End Version, Pin End Version, 60 Circuits, Pin Length 5.15mm, Keying Orientation A. Series:74074 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm

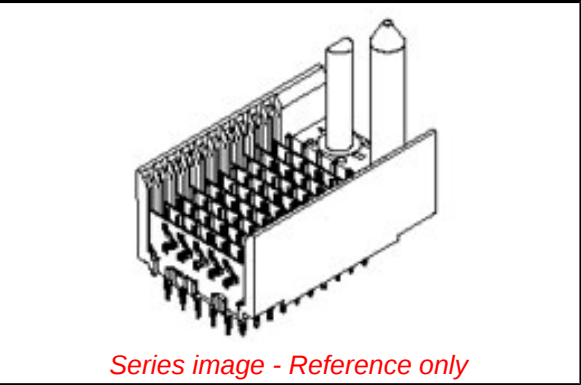

Documents:

Drawing (PDF)

Product Specification PS-74031-999 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	74059
Application	Backplane
Application Tooling Documents	TM-622010999
Comments	Position A
Component Type	PCB Header
Overview	VHDM® Backplane Connector Systems
Product Name	VHDM®
UPC	800753257900
Physical	
Circuits (Loaded)	60
Circuits (maximum)	60
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	7.939/g
Number of Columns	10
Number of Pairs	Open Pin Field
Number of Rows	6
Orientation	Vertical
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.80mm
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	1.00mm
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/21/2016 (20 June

2016)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

74059 Series

Mates With

74030 VHDM® Board-to-Board

Daughtercard Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description

Product #

6-Row Pin and

0622015800

Shield Repair Tool

0622020203

Insertion Module

for Advanced Mate

Signal Header, 6-

Electrical	
Current - Maximum per Contact	2.0A
Data Rate	3.125 Gbps
Shield Type	Ground Plane Shield
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Solder Process Data	
Lead-freeProcess Capability	N/A

Material Info

Reference - Drawing Numbers	
Product Specification	PS-74031-999
Sales Drawing	SD-74059-002

Note: HDM, HDM+, VHDM, VHDM-HSD and GbX are trademarks or registered trademarks of Amphenol TCS.

Row by 10-Wide, 20.00mm Insertion Module for Advanced Mate Signal Header, 6- Row by 10-Wide, 20.00mm Signal Pin Inserter Repair Tool 6-Row Shield Extraction Tool Insertion Module for Advanced Mate Signal Header, 6- Row by 11-Wide, 20.00mm	 <u>0622020207</u> <u>0622015700</u> <u>0622016000</u> <u>0622011101</u>
---	--

This document was generated on 09/30/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION