

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2003

© COPYRIGHT 2003

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

1K

DIST


2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	EC ESE0-0136-03	19Dec03	LD	JS

1. RJ45 CAT6 UTP PATCH CABLE ASSEMBLIES ARE USED AS PATCH IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.

2. EACH ASSEMBLY IS SUPPLIED IN A POLYTHENE BAG.

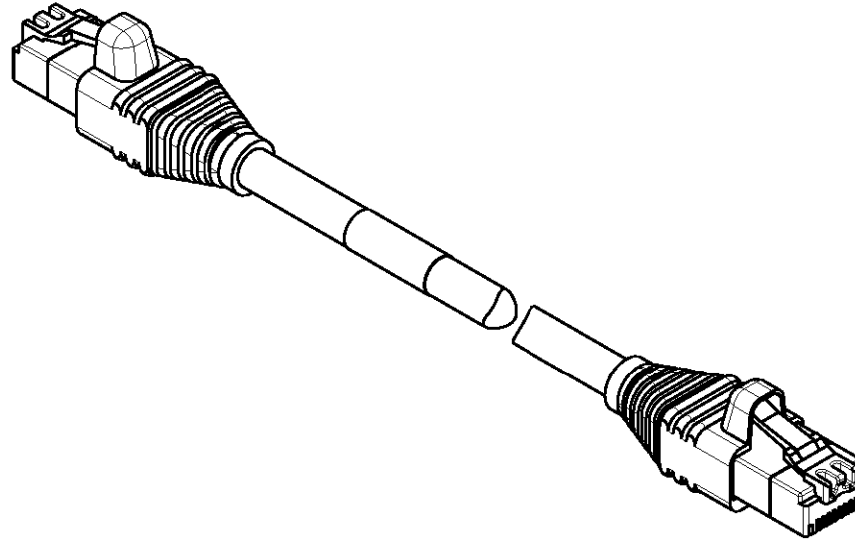


1-1711096-6	12500 - 12550	12,5
1-1711096-5	15000 - 15050	15,0
1-1711096-4	7500 - 7550	7,5
1-1711096-3	2500 - 2550	2,5
1-1711096-2	1500 - 1550	1,5
1-1711096-1	500 - 550	0,5
1-1711096-0	10000 - 10050	10,0
1711096-6	6000 - 6050	6,0
1711096-5	5000 - 5050	5,0
1711096-4	4000 - 4050	4,0
1711096-3	3000 - 3050	3,0
1711096-2	2000 - 2050	2,0
1711096-1	1000 - 1050	1,0
TE AMP P/N	DIM "A"	METERS, REF

VIEW A



1 → 8

A



SIDE A

4

150±25

"A"


3

2

1

SIDE B

B



1 → 8

VIEW B

SIDE A PIN NR.	SIDE B PIN NR.	COLOR CODE
1	1	WHITE/ORANGE
2	2	ORANGE
3	3	WHITE/GREEN
4	4	BLUE
5	5	WHITE/BLUE
6	6	GREEN
7	7	WHITE/BROWN
8	8	BROWN

1	LABEL	4
s.table	CABLE UTP LSZH 4x2xAWG24/7 RED	3
2	BOOT, Ø5.5mm, RED	2
2	MOD PLUG, 8 POSITION, RJ45	1
QTY	DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL -	FINISH -

DWN	L. de Dios	19Dec03
CHK	A. Puell	19Dec03
APVD	J. Sanabria	19Dec03
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	
CUSTOMER DRAWING		

tyco Electronics		Tyco Electronics AMP España, S.A. Barcelona, Spain.	
NAME PATCH CABLE ASSEMBLY, RJ-45, CAT6, UTP, LSZH, RED			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1711096	-
SCALE 1:1		SHEET 1 OF 1	REV A