

Power cable - SAC-3P- 2,0-U50/MINFS - 1417098

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Power cable, 3-position, PVC, black, free cable end, A - standard, on Socket straight 7/8"-16UNF, Cable length: 2 m

Why buy this product

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: connectors and cables with a large conductor cross section for power supply

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 222356
GTIN	4055626222356

Technical data

Dimensions

Length of cable	2 m
-----------------	-----

Ambient conditions

Ambient temperature (operation)	-20 °C ... 105 °C (Plug / socket)
Degree of protection	IP68

General

Rated current at 40°C	23.5 A
Rated voltage	600 V AC/DC
Number of positions	3
Status display	No
Protective circuit/component	Unwired
Insertion/withdrawal cycles	100
Torque	10 lb _F -in.
	1.12 Nm

Power cable - SAC-3P- 2,0-U50/MINFS - 1417098

Technical data

Material

Contact material	CuZn
Contact surface material	AU
Contact carrier material	PVC
Material of grip body	PVC
Material, knurls	Anodized aluminum

Cable


Cable type	TC-ER/600V, STOOW
Cable abbreviation	U50
AWG signal line	14
Conductor cross section signal conductor	3 x AWG 14
Wire colors	Green 1, black 2, white 3
Overall twist	3 wires, twisted
External sheath, color	black
External cable diameter	14.53 mm
Outer sheath, material	PVC
Material conductor insulation	PVC
Conductor material	Bare Cu litz wires
Nominal voltage, cable	600 V
Flame resistance	UL 1581, FT2
Resistance to oil	Premium oil resistance (jacket and conductor)
Other resistance	UV resistant (720 h) UL 2556

Standards and Regulations

Resistance to oil	Premium oil resistance (jacket and conductor)
Flame resistance	UL 1581, FT2
Other resistance	UV resistant (720 h) UL 2556


Drawings

Dimensional drawing

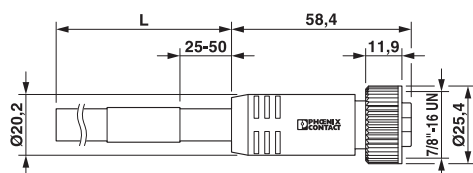

7/8"-16UNF socket, straight


Circuit diagram

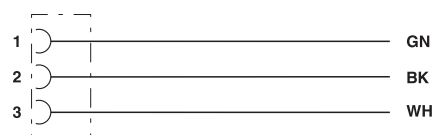

Contact assignment of 7/8" socket

Power cable - SAC-3P- 2,0-U50/MINFS - 1417098

Schematic diagram



Pin assignment, socket, 7/8"-16UNF, 3-pos., view of female side

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>