



THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.	
PART NUMBER	REV	FIRST USED	POWER UNIT
1852163-1	C	122500-1	LEADMAKER & BENCH MODEL G
1852163-2	C	565435-5	BENCH MODEL K
7-1852163-7	B	-	SPARE PARTS
		FEED TYPE	
		POST FEED	
		POST FEED	
		-	

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ SET-UP MAG WIRE ONLY
- PAD A 1 (12) +2 (16)
- PAD B 1 (14) +1 (12)
- PAD C 1 (14) + 1 (13)
- PAD D 2 (14)

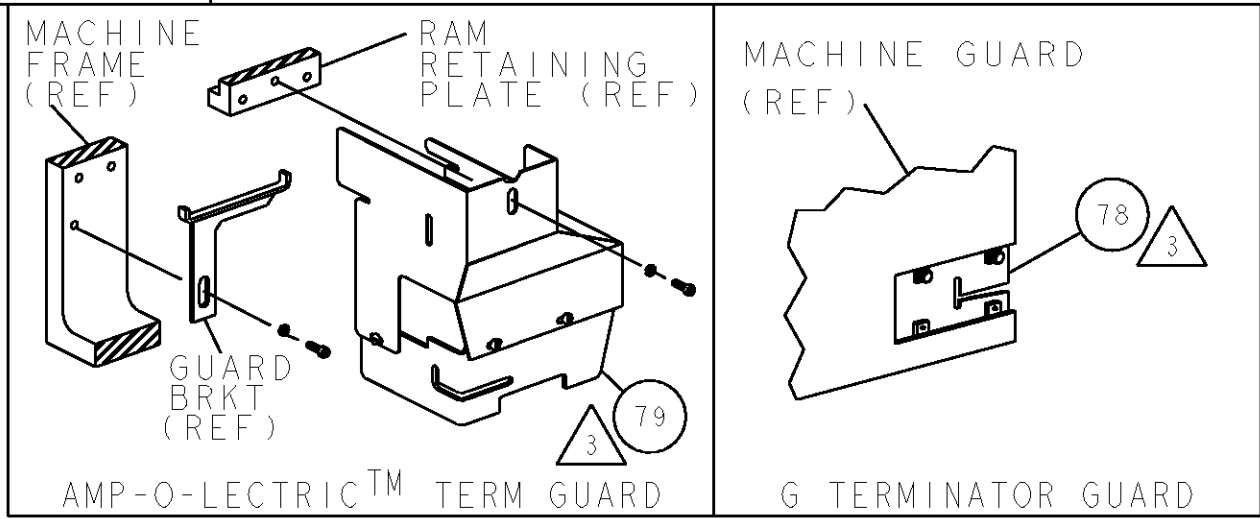

TERMINAL NAME: SPADE, AMPLIVAR 9 SERRATIONS					
1742348	-	AMP TERMINAL - AMP CRIMP SPECS			
-	-				
-	-				
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE
-	-	A	.126±.002[3.20±0.05mm]		11700-13000
-	-	B	.122±.002[3.10±0.05mm]		10000-11600
-	-	C	.116±.002[2.95±0.05mm]		8500-10000
-	-	D	.112±.002[2.84±0.05mm]		7000-8400
-	-	CRIMP		SIZE	TYPE
-	-	WIRE		.180 [4.57mm]	F
-	-	INSUL		-	-
WIRE STRIP LENGTH		TERM APPL SPEC	FEED	APPL INSTRUCTIONS	SET UP GAGE
.265-.295		114-2003	.903	408-8039	458638-1

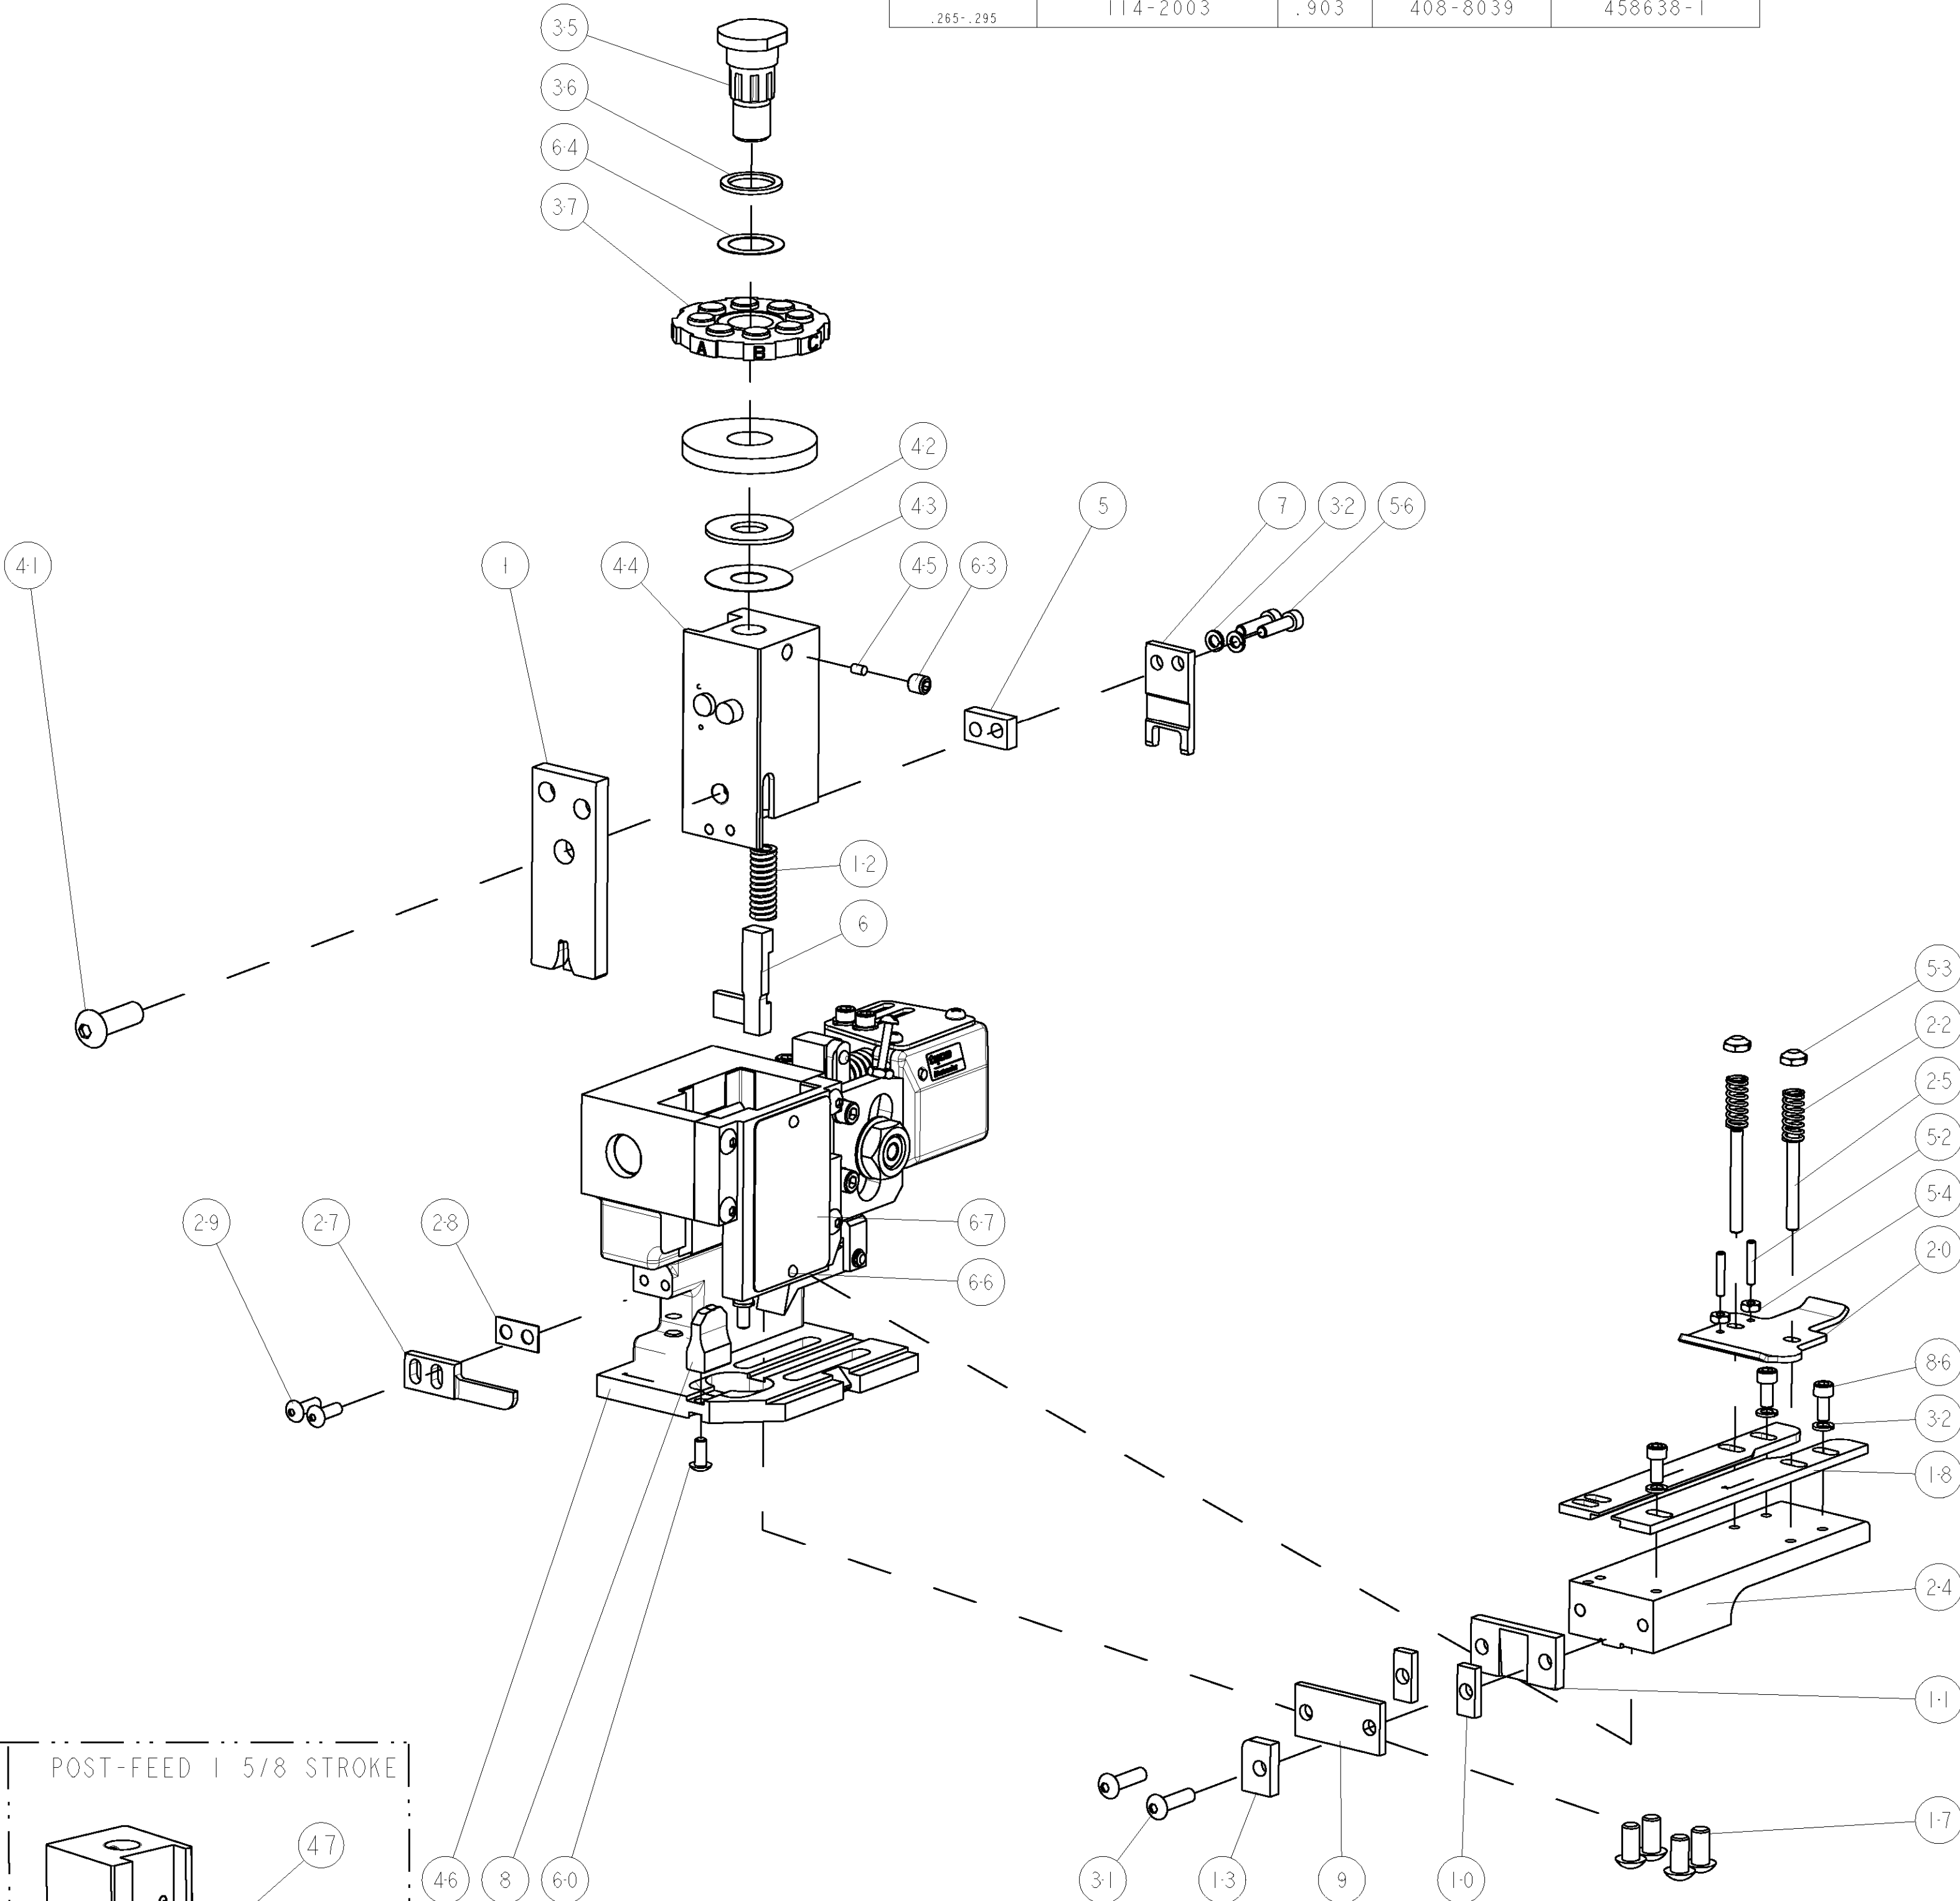

-	2	2	-	3-354779-6	PIN, WIRE DISC, .3170	129
-	2	2	-	2-354779-8	PIN, WIRE DISC, .3130	128
-	2	2	-	1-354779-4	PIN, WIRE DISC, .3060	127
-	2	2	-	354779-8	PIN, WIRE DISC, .3030	126
△	4	4	-	2-21000-6	SCR, SKT HD CAP 8-32 X .375	86
△	REF	-	-	455745-1	GUARD WINDOW	79
-	-	REF	-	679532-1	INSERT, GUARD	78
-	1	1	-	217238-1	GENERAL INSTRUCTION PKG	72
-	1	1	-	4088039	EF APPL INST 408-8039	71
-	1	1	-	461264-1	PLATE, IDENTIFICATION	67
-	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	-	986950-1	WASHER, FLAT PRECISION	64
-	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	2	2	-	2-21000-8	SCR, SKT HD CAP 8-32 X .625	56
-	2	2	-	21018-4	NUT, HEX, REG 4-40	54
-	2	2	-	21022-2	NUT, LOCK, HEX, TORQUE, 8-32	53
-	2	2	-	2-21006-6	SCR, SET, CUP POINT 4-40 X .625	52
-	1	1	-	1-21002-7	SCR, BTN SKT CAP 6-32 X .375	49
-	1	-	-	690501-3	CAM, POST FEED, 1 1/8	48
-	-	1	-	690501-4	CAM, POST FEED, 1 5/8	47
-	1	1	-	458980-1	SUB ASSY, APPLICATOR FRAME	46
-	1	1	-	690191-1	PLUG, NYLON	45
-	1	1	-	455674-3	RAM	44
-	1	1	-	690125-1	SHIM SUB-ASSY	43
-	1	1	-	690124-5	WASHER, RAM (.062)	42
-	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	-	690223-2	SPACER, INS.	38
-	1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
-	1	1	-	22480-5	SPRING, COMPRESSION	36
-	1	1	-	690212-1	POST, RAM	35
-	6	6	-	21024-4	WASHER, SPRG LOCK, REG NO 8	32
-	2	2	-	2-21002-9	SCR, BTN SKT HD CAP 10-32 X .750	31
-	2	2	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	29
-	1	1	-	1-690451-7	SPACER, STRIPPER	28
-	1	1	-	240639-1	STRIPPER (MACHINING)	27
-	2	2	-	22354-8	STUD, THREADED	25
-	1	1	-	455678-1	PLATE, STRIP GUIDE	24
-	2	2	-	4-22281-1	SPRING, DRAG	22
-	1	1	-	454177-1	DRAG	20
-	1	1	-	2-458030-1	STRIP GUIDE, REAR	18
-	1	1	-	2-458031-1	STRIP GUIDE, FRONT	18
-	4	4	-	3-21002-3	SCR, BTN SKT HD CAP 1/4-20 X .500	17
-	1	1	-	690481-2	SPACER, HOLD DOWN	13
-	1	1	-	23846-1	SPRING, DIE	12
△	1	1	-	240644-1	PLATE, REAR SHEAR	11
-	2	2	-	2-240645-7	SPACER, SHEAR PLATE	10
△	1	1	-	240642-1	PLATE, FRONT SHEAR	9
△	1	1	-	1633354-1	ANVIL, COMBINATION	8
△	1	1	-	2-240651-9	BLADE, SLUG	7
-	1	1	-	3-455892-4	HOLD DOWN, TERMINAL	6
-	1	1	-	1-240641-8	SPACER	5
△	1	1	-	1-462808-5	CRIMPER, BLUNT F	1

1. THIS DRAWING IS THE PROPERTY OF TYCO ELECTRONICS. IT IS TO BE USED FOR THE MANUFACTURE OF TYCO ELECTRONICS PRODUCTS ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS. IT IS TO BE KEPT IN A SAFE PLACE AND NOT TO BE LOST OR DESTROYED. IT IS TO BE RETURNED TO TYCO ELECTRONICS WHEN NO LONGER REQUIRED. IT IS TO BE USED FOR THE MANUFACTURE OF TYCO ELECTRONICS PRODUCTS ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS. IT IS TO BE KEPT IN A SAFE PLACE AND NOT TO BE LOST OR DESTROYED. IT IS TO BE RETURNED TO TYCO ELECTRONICS WHEN NO LONGER REQUIRED.										DWN		1ANOV05		tyco		Tyco Electronics											
										CHG		1ANOV2005		Electronics		Harrisburg, PA 17105-3608											
DIMENSIONS:										TOLERANCES UNLESS OTHERWISE SPECIFIED:		E LBL IN		1ANOV2005		NAME		END FEED HDM APPLICATOR									
INCHES												F BENCHOFF		1ANOV2005		APPRO											
										0 PLC		±		PRODUCT SPEC		±0.01		-									
										1 PLC		±0.1		APPLICATION SPEC		-		-									
										2 PLC		±0.01		-		-											
										3 PLC		±0.001		-		-											
WATERIAL										FINISH		4 PLC		±0.0001		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO					
-										-		ANGLES		±0.0001		A		00779		C=1852163		-					
-										-		WEIGHT		-		CUSTOMER DRAWING		SCALE		3:5		SHEET		1 OF 1		REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852163-1](#)