

F

E

D

C

B

A

F


E

D

C

B

A

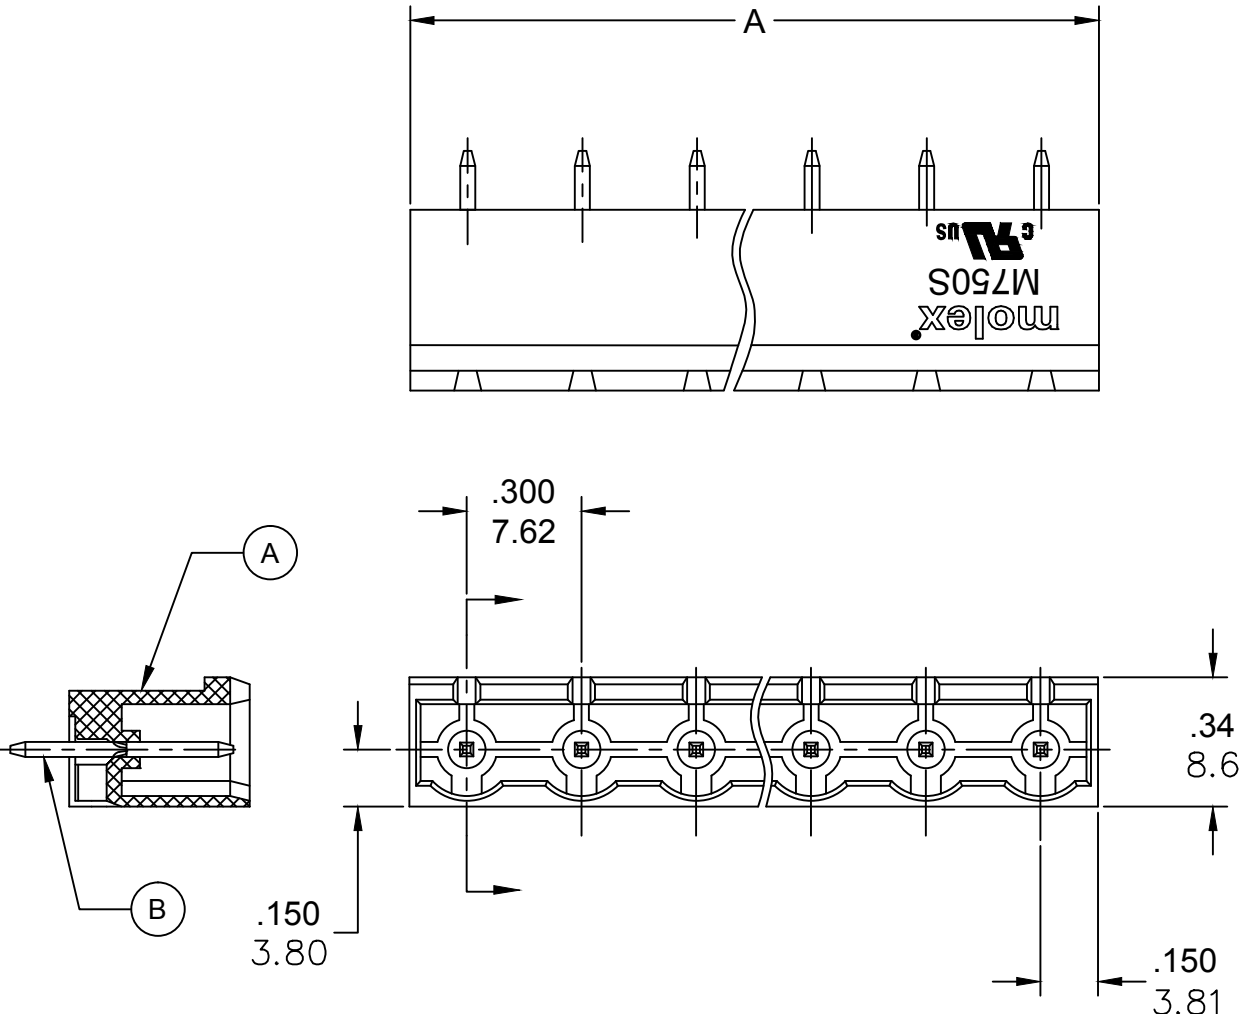


SPECIFICATIONS:

1. MATERIAL:
 - A. BODY: PA66, UL94 V-0
 - B. TERMINAL: BRASS, TIN PLATED
2. RATING: 15A AT 51-150V, 10A AT 151 TO 300V
3. OPERATING TEMPERATURE: -40°C + 105°C
4. DIELECTRIC VOLTAGE WITHSTAND: AC 2500V FOR 1 MINUTE.
5. INSULATION RESISTANCE: DC 500V, 500MΩ.
6. RATED IMPULSE VOLTAGE: 4000V, PLUS AND MINUS 5 TIMES EACH.
7. MAX. SOLDERING TEMPERATURE: +260°C FOR 5 SEC.
8. MATES WITH TERMINAL PLUG SERIES: 39704
9. DIMS SHOWN ARE FOR REFERENCE ONLY

RELEASED EC NO: IPG2014-1194 DRWN: RSTONE 2014/01/30 CHKD: G. FARNS APPR: JFMURPHY 2014/10/16	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY RSTONE	DATE 2014/01/23	TITLE 7.62MM EURO HEADER VERTICAL, CLOSED END ----				
			4 PLACES	±---	±---	CHECKED BY G. FARNS						DATE ---
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2014/10/16	MOLEX INCORPORATED	DOCUMENT NO. SD-39724-001		SHEET NO. 1 OF 1
			2 PLACES	±0.13	±.01							
			1 PLACE	±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
			ANGULAR ±---°									
	REV						MATERIAL NO. SEE CHART					
				SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

PART NUMBER DATA							
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm		B IN mm	
2	397240002	M750S-03-5-02-3	GREEN	.60	15.2	.300	7.62
3	397240003	M750S-03-5-03-3	GREEN	.90	22.9	.600	15.24
4	397240004	M750S-03-5-04-3	GREEN	1.20	30.5	.900	22.86
5	397240005	M750S-03-5-05-3	GREEN	1.50	38.1	1.200	30.48
6	397240006	M750S-03-5-06-3	GREEN	1.80	45.7	1.500	38.10
7	397240007	M750S-03-5-07-3	GREEN	2.10	53.3	1.800	45.72
8	397240008	M750S-03-5-08-3	GREEN	2.40	61.0	2.100	53.34
9	397240009	M750S-03-5-09-3	GREEN	2.70	68.6	2.400	60.96
10	397240010	M750S-03-5-10-3	GREEN	3.00	76.2	2.700	68.58
11	397240011	M750S-03-5-11-3	GREEN	3.30	83.8	3.000	76.20
12	397240012	M750S-03-5-12-3	GREEN	3.60	91.4	3.300	83.82

REF. LAST 2 DIGITS OF PART NUMBER EQUALS NUMBER OF POLES

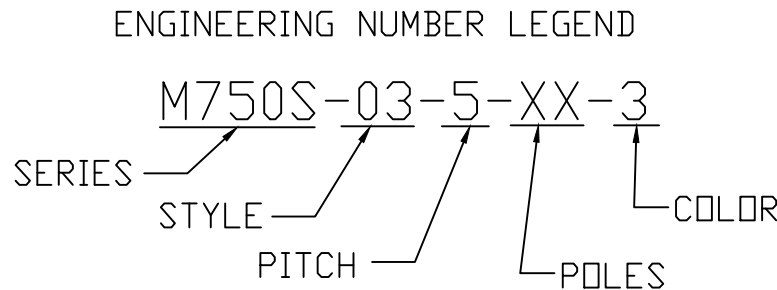

CONTACT FACTORY FOR OPTIONAL COLORS

