

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0461148280

Status:


Active

Overview:

EXTreme LPHPower™ Connectors

Description:

1.27mm, 12.00mm Pitch, EXTreme LPHPower™ Receptacle Header, Vertical, Compliant Pin, 8 Power Contacts, 28 Signal Contacts, Select Gold (Au) Plating, with BMI Guides

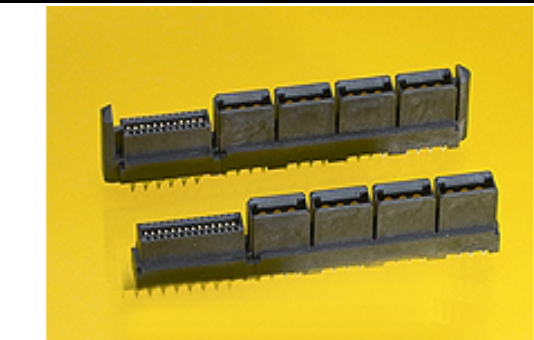

Series image - Reference only

Documents:	
3D Model	Application Specification AS-46114-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-46114-003 (PDF)
Product Specification PS-46114-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19880
UL	E29179
General	
Product Family	PCB Receptacles
Series	46114
Application	Board-to-Board, Power
Application Tooling Part Link	62100-6300
Application Tooling Part Link	62201-8671
Comments	Press Fit Pin
Overview	EXTreme LPHPower™ Connectors
Product Name	EXTreme LPHPower™
UPC	800756886763
Physical	
(p)ower-(s)ignal Configuration	8p - 28s
Circuits (Loaded)	32
Circuits (maximum)	32
Color - Resin	Black
Durability (mating cycles max)	250
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	11.382/g
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tray
Pitch - Mating Interface	1.27mm, 12.00mm
Pitch - Termination Interface	1.27mm, 2.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per	
-ED/01/2017 (12	
January 2017)	
Halogen-Free	
Status	
Low-Halogen	
Need more information on product	
environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any	
non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

46114 Series

Mates With

45985 EXTreme LPHPower™ Header

Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	30.0A
Grounding to PCB	No
Voltage - Maximum	250V AC (RMS)/DC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-46114-001-001
Packaging Specification	PK-46114-003
Product Specification	PS-46114-001-001
Sales Drawing	SD-46114-800

This document was generated on 03/01/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

46114-8280