

3.2×2.5mm for Automotive



RoHS Compliant

Features

- Crystal unit for automotive electronics
- Improved solderability
- Improved mounting stability with 4 terminals
- Improved anti-noise performance with GND terminal
- Using ceramic package resulting in high reliability
- Small and low profile
- Improved rust prevention performance
- Reflow compatible
- Highly reliable solder junction (3000 heat cycles -40 to +125°C)
- AEC-Q200 qualified

Applications

- ECU • TPMS
- High-Speed Automotive Network

How to Order

CX3225SA 12000 ☐ ☐ ☐ ☐ ☐ ☐

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series ② Frequency
③ Load Capacitance ④ Frequency Tolerance
D0 8 pF **P** $\pm 50 \times 10^{-6}$
⑤ Operating Temp. Range ⑥ Frequency Temp. Stability
TW -40 to +150°C $\pm 200 \times 10^{-6}$
⑦ Individual Specification

Packaging (Tape & Reel 1000/ 3000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	8000 to 54000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f _{tol}	±50	×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-40 to +150	°C	
Storage Temp. Range	T _{stg}	-40 to +150	°C	
Frequency Temp. Characteristics	f _{tem}	±200	×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
8000≤f _{nom} < 9800kHz	500Ω max.
9800≤f _{nom} <13560kHz	200Ω max.
13560≤f _{nom} <16000kHz	100Ω max.
16000≤f _{nom} <20000kHz	60Ω max.
20000≤f _{nom} ≤54000kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
8000≤f _{nom} ≤54000kHz	10μW (200μW max.)

Dimensions

(Unit: mm)

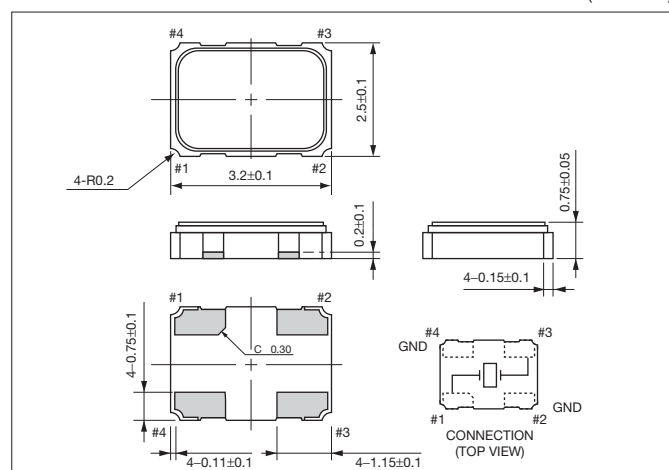

Recommended Land Pattern

(Unit: mm)

