
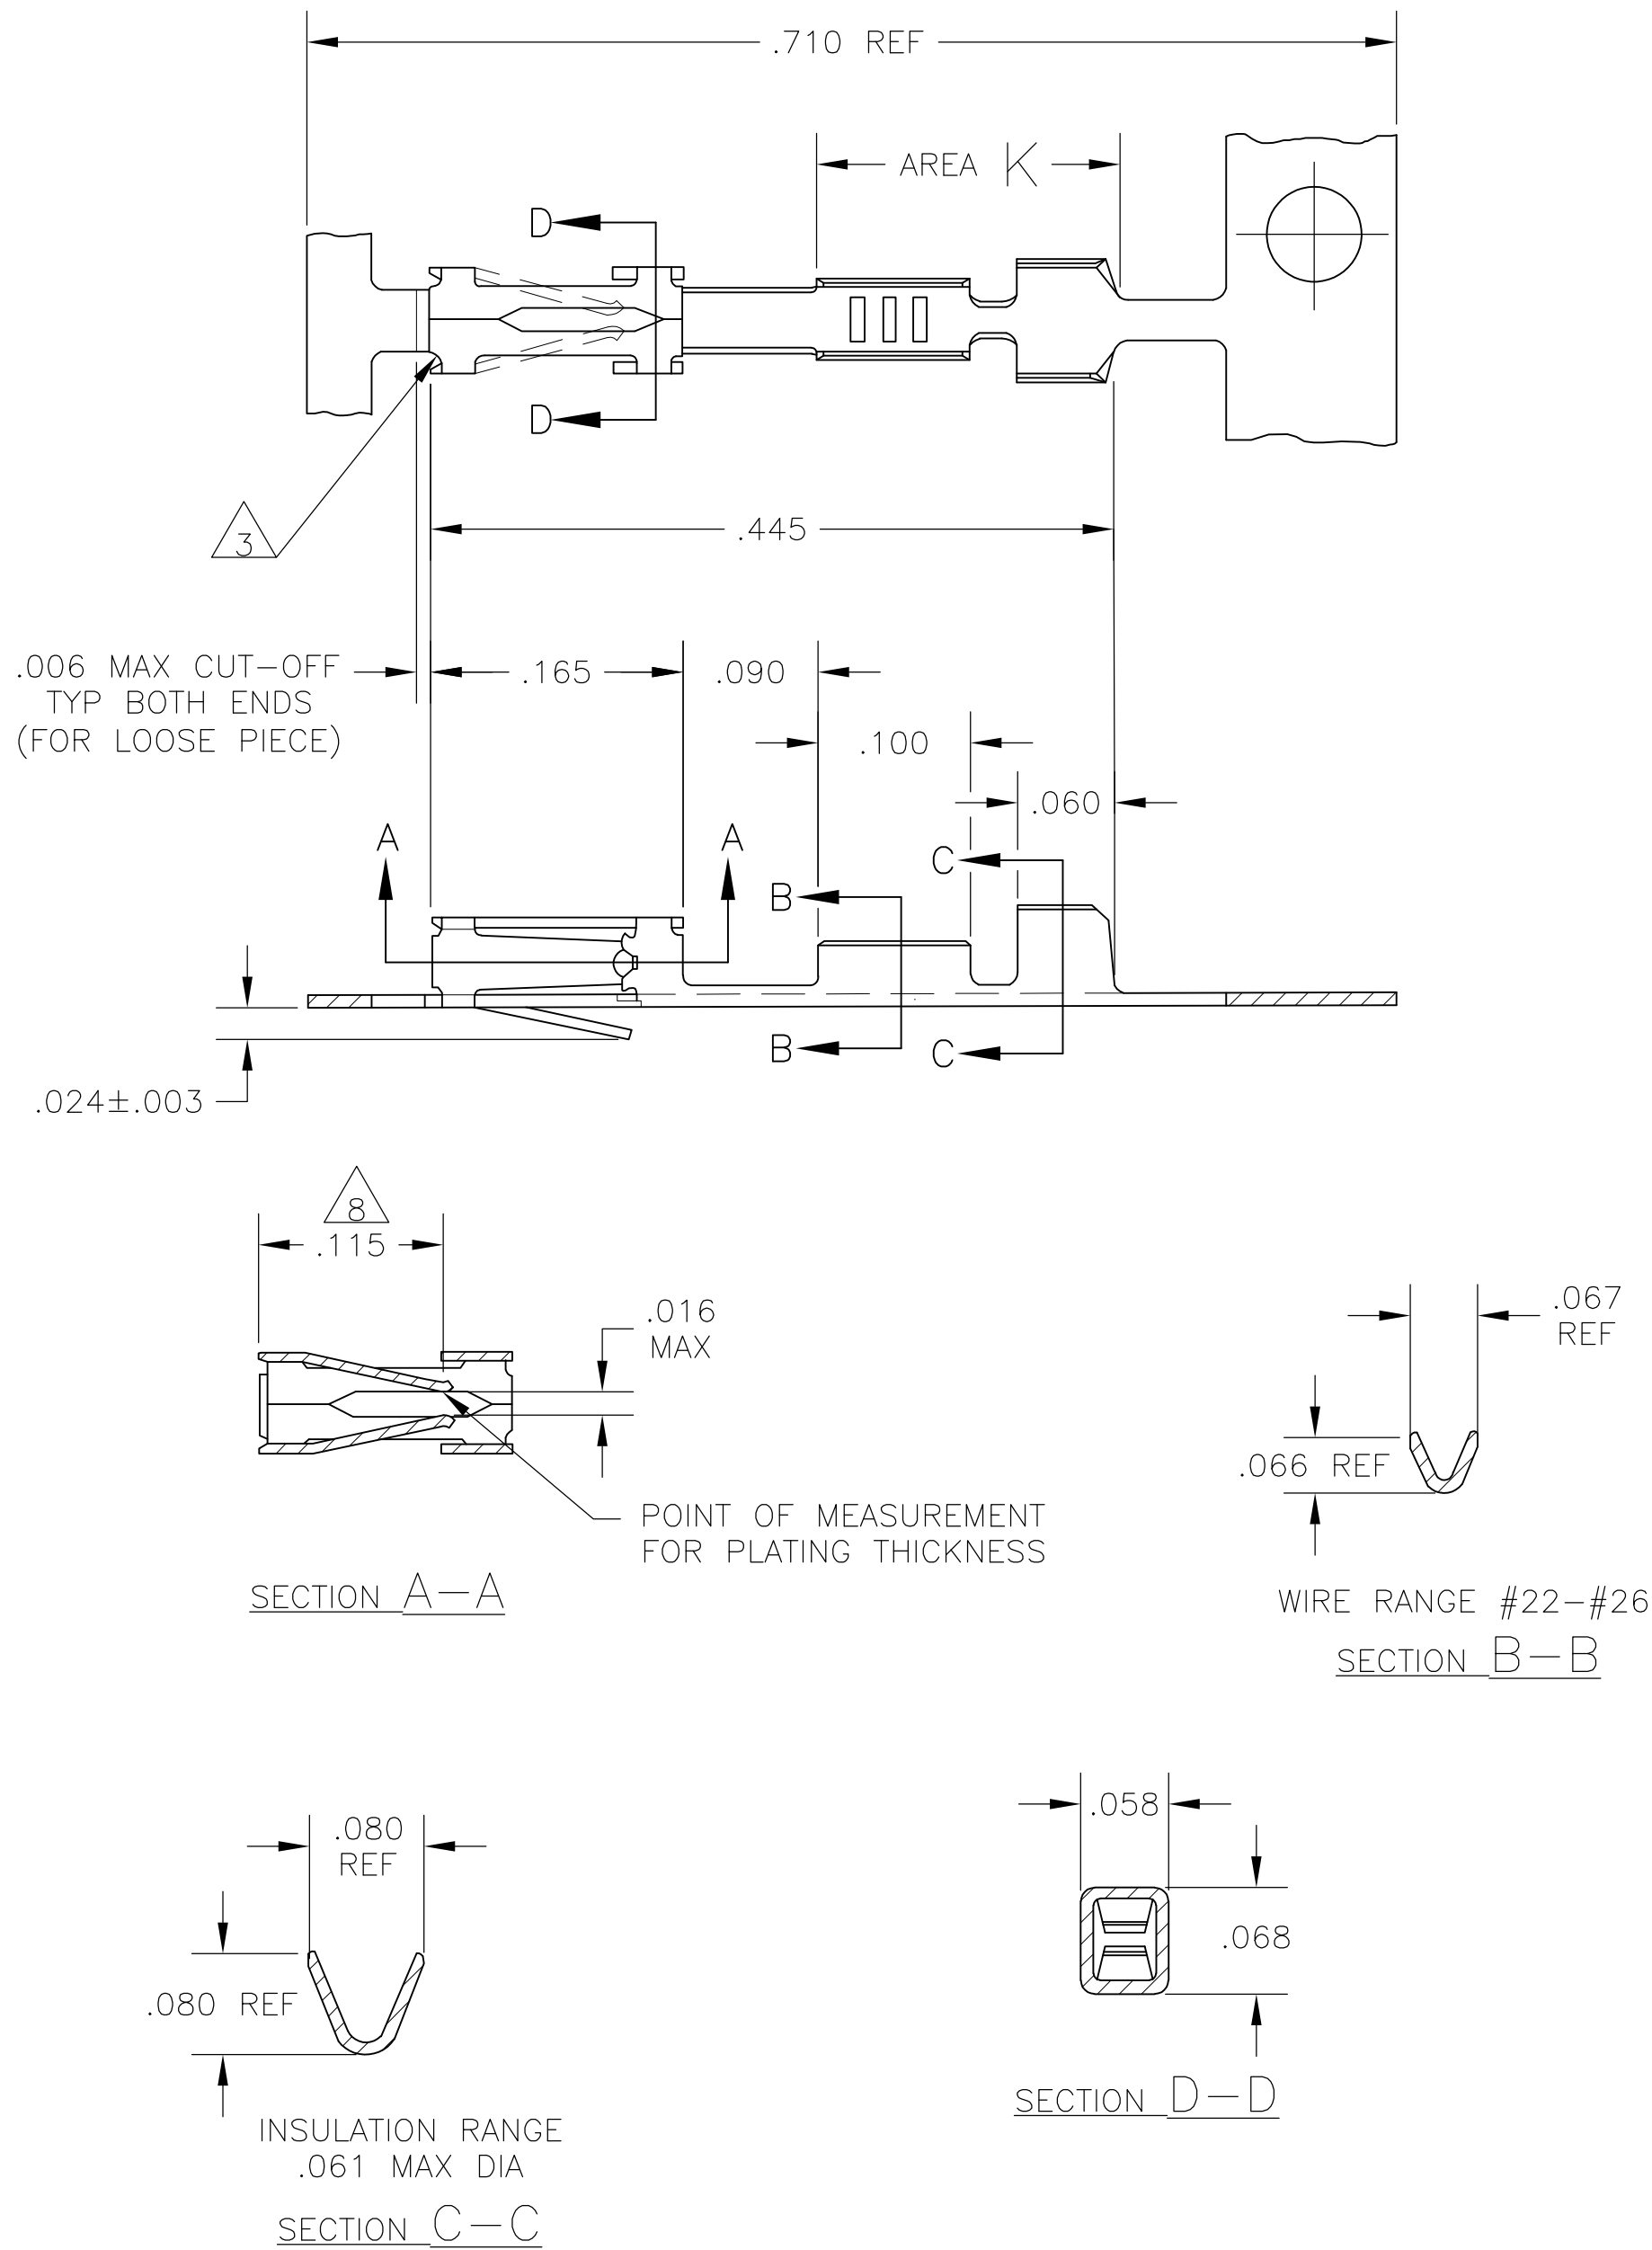


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		J2	REVISED PER ECO-11-004820	11MAR11	RK	HMR



1. REELED FOR MINI APPLICATOR.
- 3 CUT OUTS ON BOX AT MANUFACTURER'S OPTION.
- .000015 GOLD ON CONTACT AREA, .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- .000030 GOLD ON CONTACT AREA, .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- SHEARED EDGES PERMITTED TO BE UNPLATED.
- .000100-.000200 BRIGHT TIN-LEAD OVER .000030 NICKEL.
- POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- OBSOLETE PART NUMBER
- SUPERCEDED BY 103171-5.
- .000015 GOLD ON CONTACT AREA, MATTE TIN IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- .000030 GOLD ON CONTACT AREA, MATTE TIN IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

5-103171-5	12 6	5-103171-4
13 5-103171-2	11 6	5-103171-1
9 -8	6 7	9 -7
103171-5	5 6	103171-4
103171-2	4 6	103171-1
LOOSE PIECE PART NO	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 31 MAR 83	 TE Connectivity					
DIMENSIONS: INCHES		CHK —	NAME CONTACT, RECEPTACLE, MOD IV 1/2 CRIMP SNAP-IN FOR 22-26 AWG WIRE					
		APVD — 11 APR 83						
		PRODUCT SPEC —						
		APPLICATION SPEC —						
MATERIAL CU-SN-P ALLOY 521 .008 THK. COMPL.		ANGLES ± — FINISH	WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C-103171	RESTRICTED TO —	
SEE TABLE		CUSTOMER DRAWING				SCALE 8:1	SHEET 1 of 1	REV J2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103171-5](#)