

**GLASS PASSIVATED
UNIDIRECTIONAL AND BIDIRECTIONAL
TRANSIENT VOLTAGE SUPPRESSORS**


REVERSE VOLTAGE - **6.8 to 440** Volts
POWER DISSIPATION - **1500** WATTS

FEATURES

- Glass passivated chip
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- The plastic material has U/L recognition 94V-O
- Fast response time

MECHANICAL DATA

- Case : Molded Plastic
- Marking : Unidirectional - type number and cathode band Bidirectional - type number only
- Weight : 1.2 grams

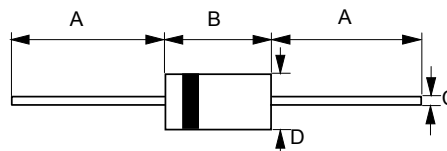DO-201


DO-201		
Dim.	Min.	Max.
A	25.4	-
B	8.50	9.50
C	0.96 $\varnothing$	1.06 $\varnothing$
D	4.80 $\varnothing$	5.30 $\varnothing$
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

CHARACTERISTICS	SYMBOLS	VALUE	UNIT
PEAK POWER DISSIPATION AT TA = 25°C, TP = 1ms (Note 1)	PPK	1500	WATTS
Peak Forward Surge Current 8.3ms single half sine-wave@Tj=25°C (Note 2)	IFSM	200	AMPS.
Steady State Power Dissipation at TL =120°C lead lengths 0.375" (9.5mm) , see fig.4 Without Heatshink	PM(AV)	2.5	WATTS
Maximum Instantaneous forward voltage at 100A for unidirectional devices only (Note 3)	VF	SEE NOTE 3	Volts
Typical Thermal Resistance (Note 4)	RθJA RθJL RθJC	55 11 10	°C/W
Operating Temperature Range	TJ	-55 to +175	°C
Storage Temperature Range	TSTG	-55 to +175	°C

NOTES : 1. Non-repetitive current pulse, per fig. 5 and derated above TA= 25°C per fig. 1

2. 8.3ms single half sine-wave duty cycle= 4 pulses per minutes maximum (uni-directional units only).

3. VF= 3.5V on 1.5KE6.8A thru1.5KE200A devices and VF= 5.0V on 1.5KE220A thru 1.5KE440A devices.

4. Thermal resistance from junction to ambient, lead and case.

REV. 9, Sep-2012, KDIF01

FIG.1 - PULSE DERATING CURVE

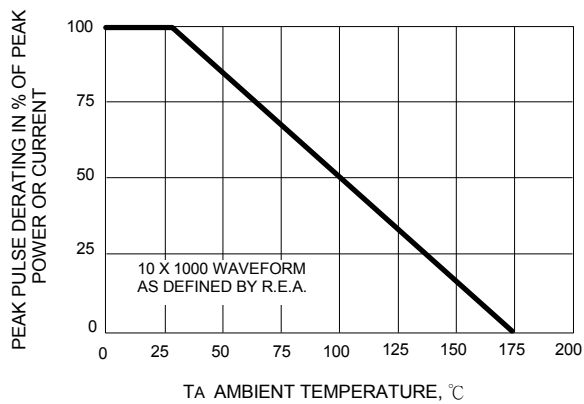


FIG.2 - TYPICAL JUNCTION CAPACITANCE

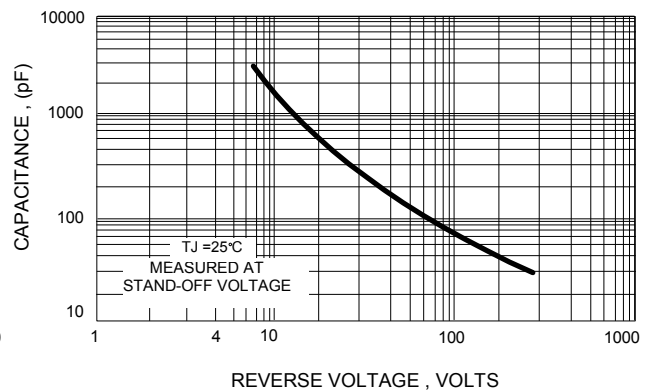


FIG.3 - PULSE RATING CURVE

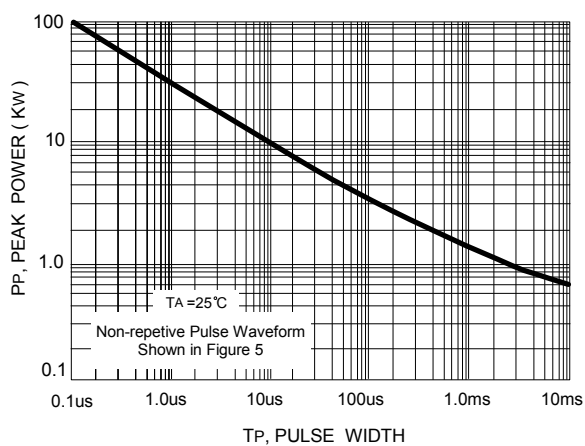


FIG.4 - STEADY STATE POWER DERATING CURVE


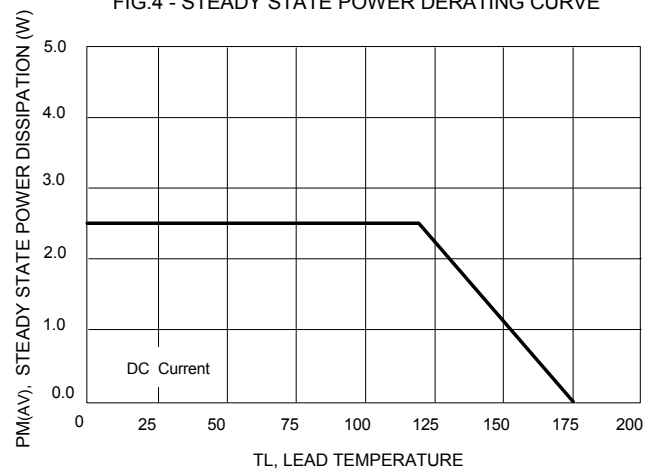


FIG.5 - PULSE WAVEFORM

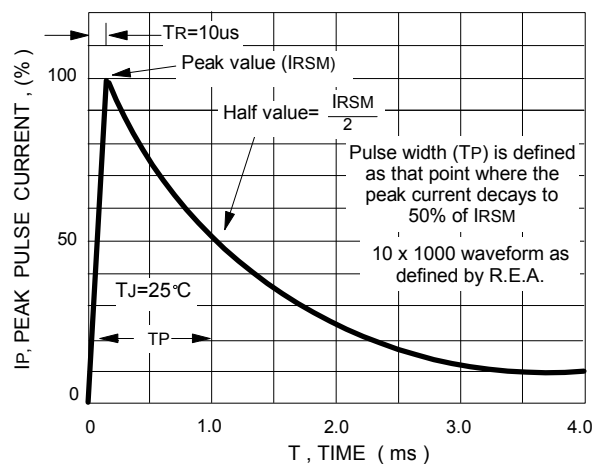

Type Number	Type Number	Reverse Standoff Voltage	Breakdown Voltage BV Volts @It			Max. Reverse Leakage @VR	Max. Peak Pulse Current	Max. Clamping Voltage @Ipp	Max. Voltage Temp. Variation of Bv
(UNI)	(BI)	VR (V)	Min (V)	Max (V)	It (mA)	IR (uA)	Ipp (A)	Vc (V)	%/°C
1.5KE6.8A	1.5KE6.8CA	5.8	6.45	7.13	10	1000	142.9	10.5	0.057
1.5KE7.5A	1.5KE7.5CA	6.4	7.13	7.88	10	500	132.7	11.3	0.061
1.5KE8.2A	1.5KE8.2CA	7.0	7.79	8.61	10	200	124.0	12.1	0.065
1.5KE9.1A	1.5KE9.1CA	7.8	8.65	9.56	1	50	111.9	13.4	0.068
1.5KE10A	1.5KE10CA	8.6	9.50	10.50	1	10	103.4	14.5	0.073
1.5KE11A	1.5KE11CA	9.4	10.5	11.6	1	5	96.2	15.6	0.075
1.5KE12A	1.5KE12CA	10.2	11.4	12.6	1	5	89.8	16.7	0.078
1.5KE13A	1.5KE13CA	11.1	12.4	13.7	1	5	82.4	18.2	0.081
1.5KE15A	1.5KE15CA	12.8	14.3	15.8	1	5	70.8	21.2	0.084
1.5KE16A	1.5KE16CA	13.6	15.2	16.8	1	5	66.7	22.5	0.086
1.5KE18A	1.5KE18CA	15.3	17.1	18.9	1	5	59.5	25.2	0.088
1.5KE20A	1.5KE20CA	17.1	19.0	21.0	1	5	54.2	27.7	0.090
1.5KE22A	1.5KE22CA	18.8	20.9	23.1	1	5	49.0	30.6	0.092
1.5KE24A	1.5KE24CA	20.5	22.8	25.2	1	5	45.2	33.2	0.094
1.5KE27A	1.5KE27CA	23.1	25.7	28.4	1	5	40.0	37.5	0.096
1.5KE30A	1.5KE30CA	25.6	28.5	31.5	1	5	36.2	41.4	0.097
1.5KE33A	1.5KE33CA	28.2	31.4	34.7	1	5	32.8	45.7	0.098
1.5KE36A	1.5KE36CA	30.8	34.2	37.8	1	5	30.1	49.9	0.099
1.5KE39A	1.5KE39CA	33.3	37.1	41.0	1	5	27.8	53.9	0.100
1.5KE43A	1.5KE43CA	36.8	40.9	45.2	1	5	25.3	59.3	0.101
1.5KE47A	1.5KE47CA	40.2	44.7	49.4	1	5	23.1	64.8	0.101
1.5KE51A	1.5KE51CA	43.6	48.5	53.6	1	5	21.4	70.1	0.102
1.5KE56A	1.5KE56CA	47.8	53.2	58.8	1	5	19.5	77.0	0.103
1.5KE62A	1.5KE62CA	53.0	58.9	65.1	1	5	17.6	85.0	0.104
1.5KE68A	1.5KE68CA	58.1	64.6	71.4	1	5	16.3	92.0	0.104
1.5KE75A	1.5KE75CA	64.7	71.3	78.8	1	5	14.6	103.0	0.105
1.5KE82A	1.5KE82CA	70.1	77.9	86.1	1	5	13.3	113.0	0.105
1.5KE91A	1.5KE91CA	77.8	86.5	95.6	1	5	12.0	125.0	0.106
1.5KE100A	1.5KE100CA	85.5	95.0	105.0	1	5	10.9	137.0	0.106
1.5KE110A	1.5KE110CA	94.0	105.0	116.1	1	5	9.9	152.0	0.107
1.5KE120A	1.5KE120CA	102.0	114.0	126.0	1	5	9.1	165.0	0.107
1.5KE130A	1.5KE130CA	111.0	124.0	137.1	1	5	8.4	179.0	0.107
1.5KE150A	1.5KE150CA	128.0	143.0	158.1	1	5	7.2	207.0	0.108
1.5KE160A	1.5KE160CA	136.0	152.0	168.0	1	5	6.8	219.0	0.108
1.5KE170A	1.5KE170CA	145.0	162.0	179.1	1	5	6.4	234.0	0.108
1.5KE180A	1.5KE180CA	154.0	171.0	189.0	1	5	6.1	246.0	0.108
1.5KE200A	1.5KE200CA	171.0	190.0	210.0	1	5	5.5	274.0	0.108
1.5KE220A	1.5KE220CA	185.0	209.0	231.0	1	5	4.6	328.0	0.108
1.5KE250A	1.5KE250CA	214.0	237.0	262.0	1	5	4.4	344.0	0.110
1.5KE300A	1.5KE300CA	256.0	285.0	315.0	1	5	3.6	414.0	0.110
1.5KE350A	1.5KE350CA	300.0	332.0	367.0	1	5	3.1	482.0	0.110
1.5KE400A	1.5KE400CA	342.0	380.0	420.0	1	5	2.7	548.0	0.110
1.5KE440A	1.5KE440CA	376.0	418.0	462.0	1	5	2.5	600.0	0.110

NOTES: 'Suffix 'C' denotes bidirectional device. Suffix 'A' denotes 5% tolerance device.

1. For bidirectional devices having VR of 10 volts and under, the IR limit is doubled .
2. For unidirectional devices 1.5KE6.8A to 1.5KE200A, VFmax = 3.5V at IF = 100A 300us square wave pulse.
For unidirectional devices 1.5KE220A to 1.5KE440A, VFmax = 5.0V at IF = 100A 300us square wave pulse.

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.