
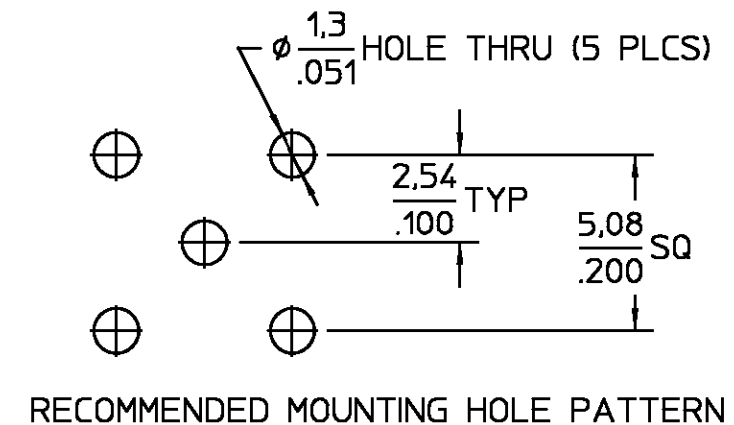


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	08/25/95	
01 ₁	REVISED	DM 3/15/99	 3/16/99

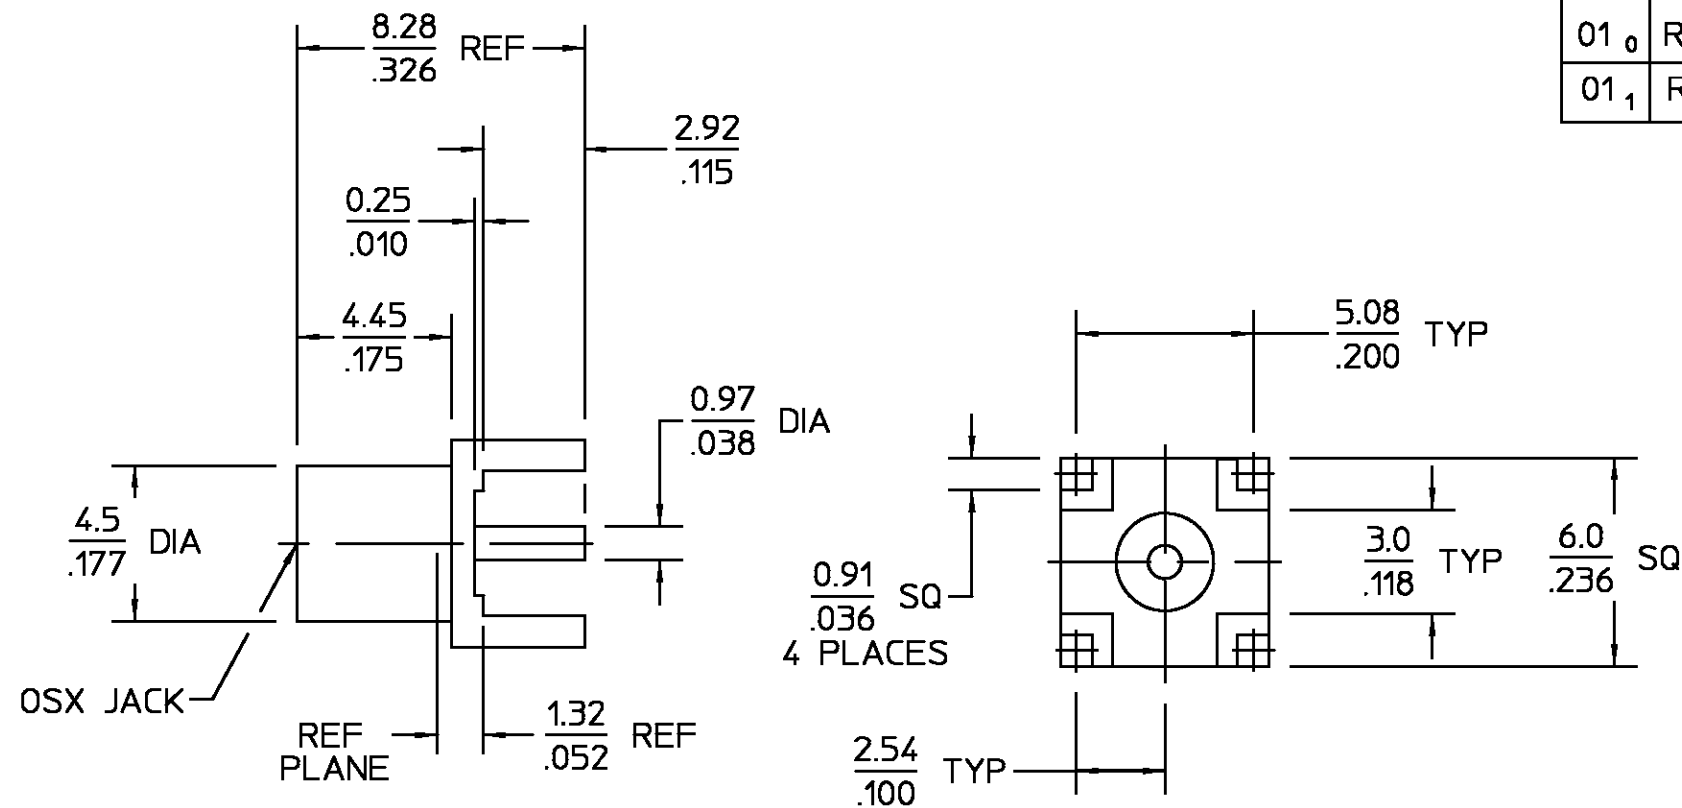

CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	BRASS, PER ASTM-B-16 HALF HARD		GOLD PLATE PER MIL-G-45204	
Nominal Impedance (Ohms) <u>50</u>	Force to Engage: (Lbs) <u>3.4 MAX</u>	Temperature Rating <u>-65°C to +165°C</u>	DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457		N/A	
Frequency Range (GHz) <u>DC TO 6.0</u>	Force to Disengage: (Lbs) <u>1.77 MIN - 4.5 MAX</u>	Vibration <u>MIL-STD-202, Method 204,</u>	CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204	
Voltage Rating (VRMS MAX) <u>335 @ Sea level</u>	Center Contact Captivation: <u>Axial 4.5lbs @ 1 minute</u> <u>with .006" displacement</u>	Condition B Thermal shock <u>MIL-STD-202, Method 107,</u>	COMPONENT	MATERIAL		FINISH	
VSWR <u>N/A</u>	<u>XX.XX = mm</u> <u>.XXX = in</u>	Condition B Moisture Resistance <u>MIL-STD-202, Method 106</u>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON DEC ANGLES ±.13 ± .1°	DRAWN BY <u>[Signature]</u> DATE <u>8/25/95</u>		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	
Insertion Loss <u>N/A</u>		Corrosion <u>MIL-STD-202,</u> <u>Method 101, Condition B,</u> <u>48 Hrs</u>	CHECKED BY	APP'D BY <u>[Signature]</u> 08/25/95			
Corona, 70,000 Ft (VRMS MIN) <u>250</u>		These drawings and specifications are the property of AMP incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSX PRINTED WIRING BOARD JACK RECEPTACLE STRAIGHT TERMINAL			
D.W.V. (VRMS MIN) <u>1000</u>		NO. AP <u>N/A</u>		SIZE B	CODE IDENT NO. 26805	5862-5002-09	REV 01 1
Contact Resistance			SCALE 5:1			SHEET 1 OF 1	
Center Contact (Milliohms MAX) <u>5.0</u>							
Outer Contact (Milliohms MAX) <u>1.0</u>							
RF High Potential (VRMS MIN @ 5 MHz) <u>670</u>							
I.R. (Megohms Min) <u>10,000</u>							

CUSTOMER DRAWING

AMP PART # 1060984-1
SHEET 1 OF 1 REV A