

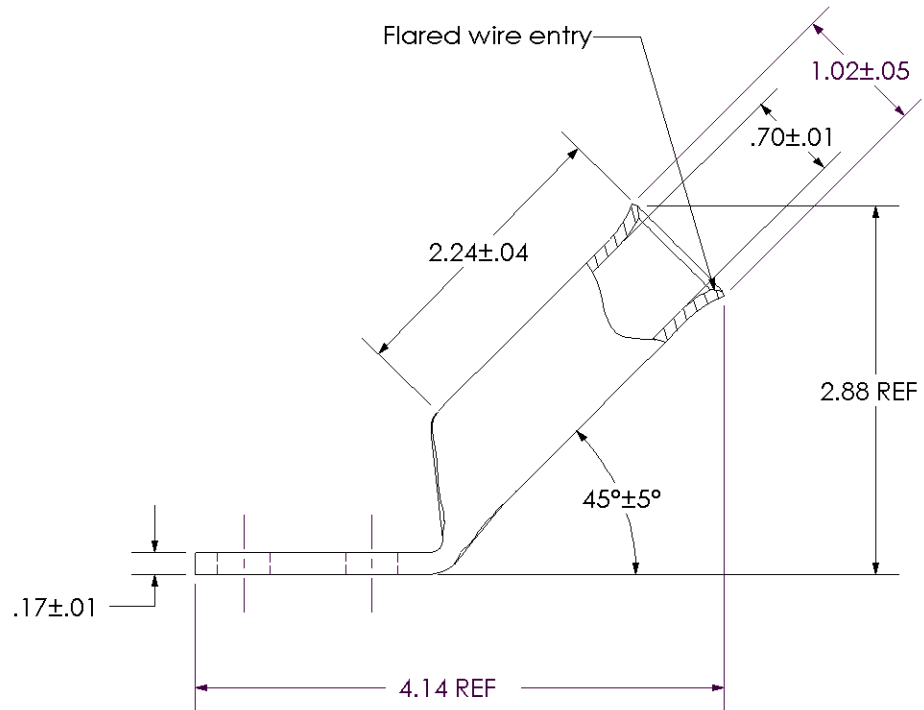


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

|                                                |                                                                                                                                                |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                       | High Conductivity Seamless Copper Tube                                                                                                         |
| Plating                                        | Electro-Tin                                                                                                                                    |
| Wire Size & Type                               | Stranded Copper Flex Cable; 262.2 kcmil (650/24) Diesel Locomotive, 250 kcmil Class K & Class M                                                |
| Wire Strip Length                              | 2-5/16 in.                                                                                                                                     |
| Stud Size                                      | 3/8 in.                                                                                                                                        |
| UL Listed Wire Connector                       | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating                          | 90° C                                                                                                                                          |
| C.S.A Certified Wire Connector                 | Yes                                                                                                                                            |
| Panduit Color Code on Barrel                   | WHITE                                                                                                                                          |
| Panduit Die Index No. on Barrel                | P66                                                                                                                                            |
| Alternate Industry Die Index No. ( ) on Barrel | (17)                                                                                                                                           |

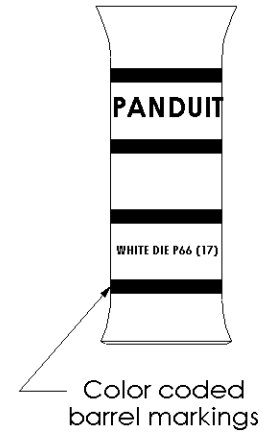

LISTED  
Wire Connector

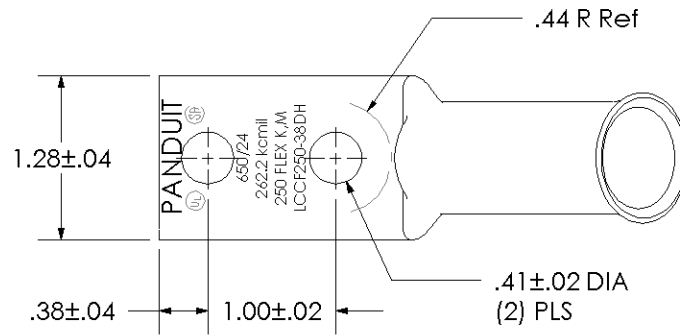

|     |      |     |     |             |       |
|-----|------|-----|-----|-------------|-------|
|     |      |     |     |             |       |
|     |      |     |     |             |       |
|     |      |     |     |             |       |
| 00  | 8/02 | SAB | DRL | RELEASED    | 10337 |
| REV | DATE | BY  | CHK | DESCRIPTION | ECN   |

|                                                        |                                            |
|--------------------------------------------------------|--------------------------------------------|
| <b>PANDUIT CORP. TINLEY PARK, ILLINOIS</b>             |                                            |
| LCCF250-38DH-X                                         |                                            |
| Copper Lug - Two-Hole, Flared Barrel, 45° Angle Tongue |                                            |
| SCALE<br>N/A                                           | DRAWING NO / CAD FILE<br>LCCF250-38DH-CUST |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCF250-38DH-X](#)