



[All Series](#) > [Series 45](#) > Part No. 45-190H.3000.111.101


## Part No. 45-190H.3000.111.101, Keylock switch

[Request Information](#)

[Printable Page](#)

[Download PDF](#)

[Email This Page](#)

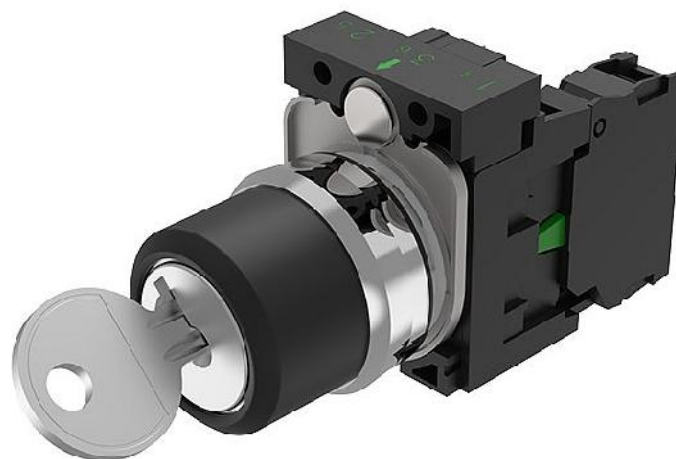

**3D CAD  
DRAWING**




**3D**




**Front View**


45-190H.3000.111.101



**2D Right Side View**



**2D Top View**



**2D Sales Drawing**



[Specifications](#) | [Bill of Materials](#)

### Specifications

Actuator

[Keylock switch](#)

Lens Colour

None

|                                   |                                         |
|-----------------------------------|-----------------------------------------|
| Function                          | 2 Pos., maint., key release L/R (KL-KR) |
| Housing Material                  | Metal/Plastic                           |
| Shape of Handle or Frontring      | None                                    |
| Lock System                       | RONIS                                   |
| Key                               | T254                                    |
| Key Type                          | Standard Lock: Ronis T254               |
| Switching Angle                   | 90 Grad (V-Pos)                         |
| Contacts                          | 1NO                                     |
| Terminal                          | Screw terminal                          |
| Voltage Illumination              | None                                    |
| Mounting Type                     | Front mounting                          |
| Mounting Style                    | Holder                                  |
| Environmental Rating              | IP66, IP67, IP69K                       |
| Industry Standards/Certifications | UL, CSA, VDE, CCC, CE, RoHS             |
| Switching Function                | On-Off                                  |
| Illumination                      | None                                    |
| Contact Material                  | Silver                                  |
| Termination Style                 | Screw                                   |
| Mechanical Life                   | 1'000'000 switching cycles              |
| AC Voltage                        | 500 V                                   |
| DC Voltage                        | 500 V                                   |
| Switching Current                 | 10 A                                    |

**Bill of Materials**

|          |                  |
|----------|------------------|
| Actuator | 45-290H.3000.111 |
|          |                  |

|                  |                  |
|------------------|------------------|
| Holder           | 45-2300.1000.000 |
| Switch Element 1 | 45-311.1Z10      |