

Customer Information Sheet

DRAWING No.: M20-787XXX

SHEET 3 OF 3




IF IN DOUBT - ASK

(C)

NOT TO SCALE


THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

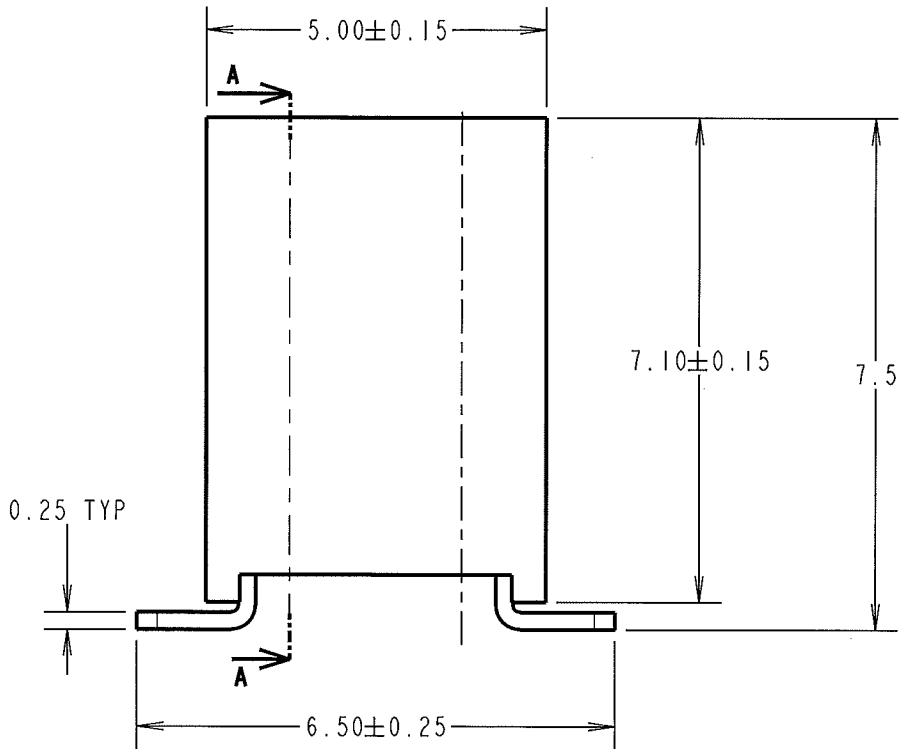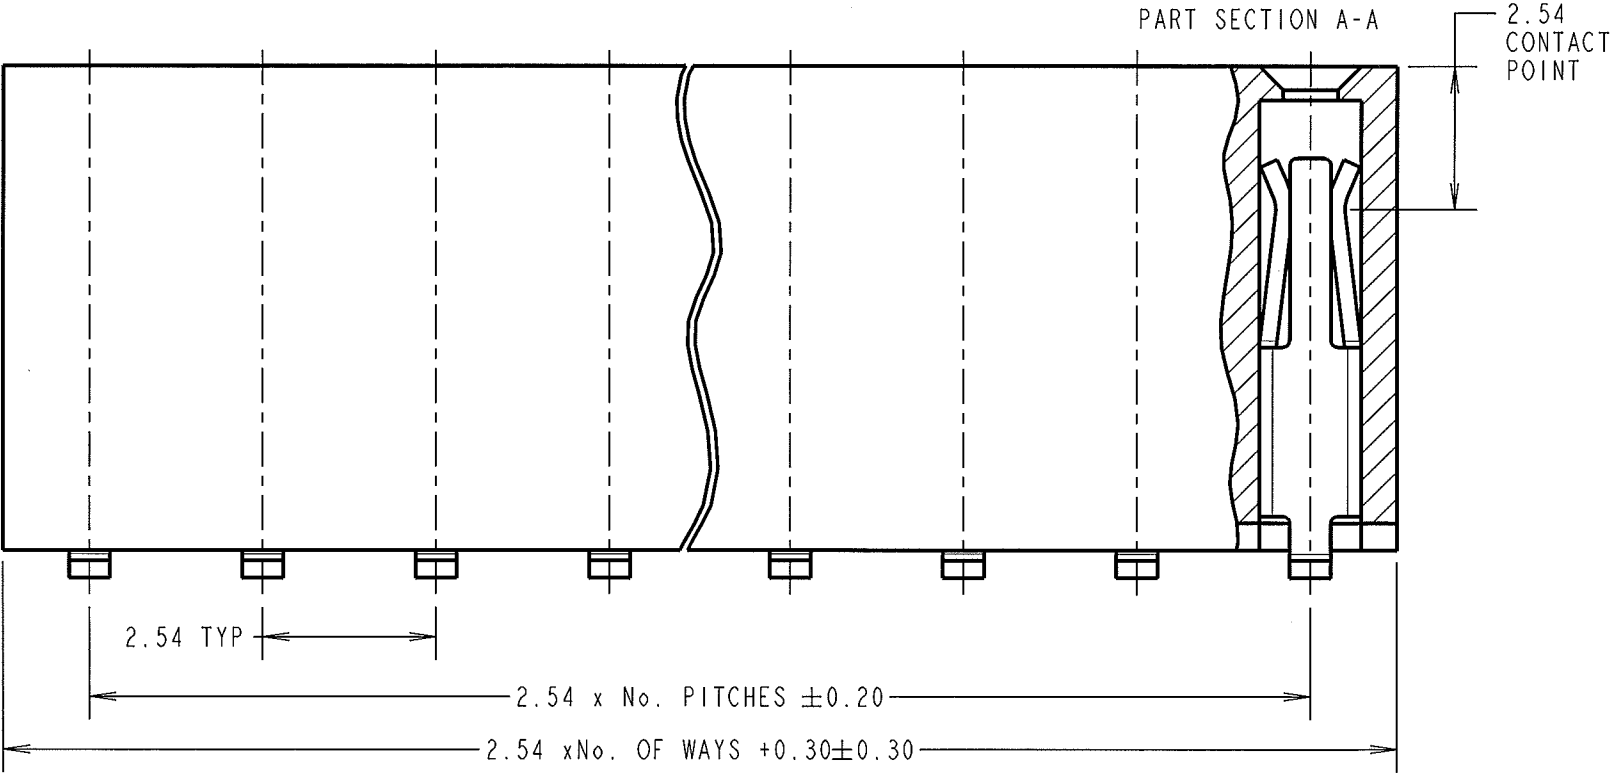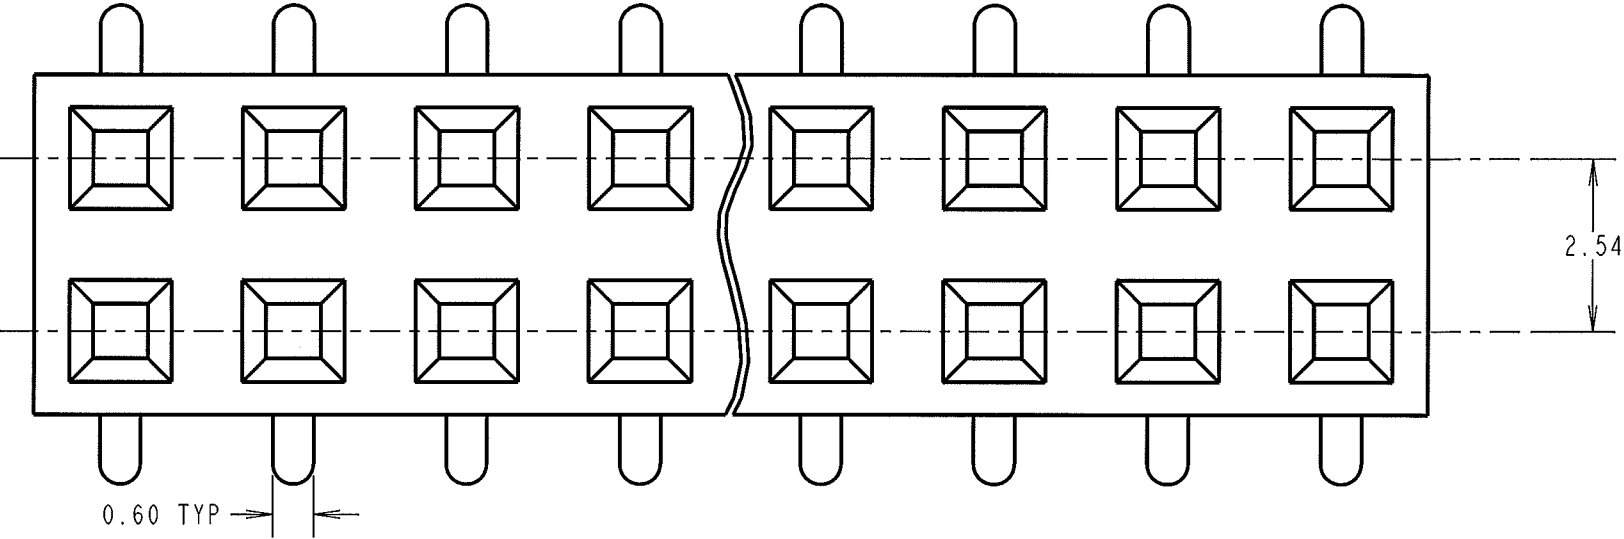

SPECIFICATION:

MATERIAL:
MOULDING = NYLON 6T UL94V-0, BLACK
CONTACTS = PHOSPHOR BRONZE
FINISH (OVER NICKEL):
42 = GOLD ON CONTACT AREA, 100% TIN ON TAILS
46 = 100% TIN
ELECTRICAL:
CURRENT RATING = 3A
VOLTAGE PROOF = 600V AC FOR 1 MINUTE
CONTACT RESISTANCE = 20 MILLIOHMS MAX
INSULATION RESISTANCE = 1,000 MEGOHMS MIN
ENVIRONMENTAL:
TEMPERATURE RANGE = -40° TO +105°
PACKING:
TUBE (FOR PACKING QUANTITIES, SEE SHEET 2)

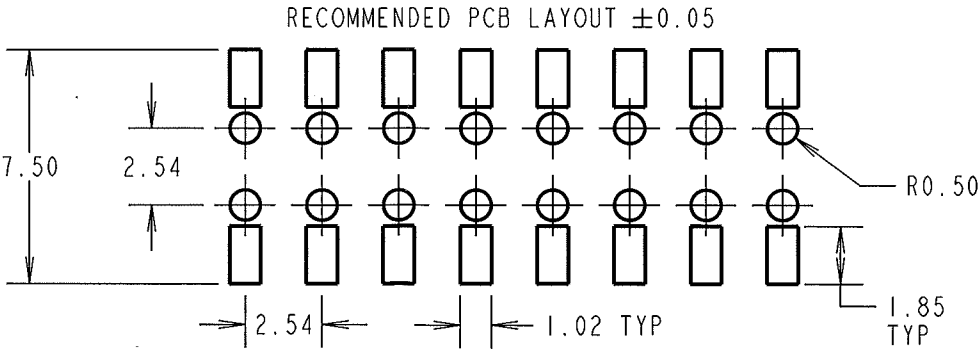

ORDER CODE:
M20-787XXX

No. OF WAYS
02 TO 40
FINISH
42 - SELECTIVE GOLD + 100% TIN
46 - 100% TIN

SF	5	16.07.08	10094
NAME	ISS.	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN:	S.FLOWER		
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE: 2.54mm PITCH DIL
VERTICAL FEMALE SMT SKT ASSY
DUAL ENTRY - PICK/PLACE CAP

DRAWING NUMBER:

M20-787XXX

SHT
3
OF 3