

Customer Information Sheet

DRAWING No.: M22-220XXXX SHEET 2 OF 2 IF IN DOUBT - ASK (C) NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

PART No.	DIM 'A'	DIM 'B'
M22-22002XX	2.00	6.00
M22-22003XX	4.00	8.00
M22-22004XX	6.00	10.00
M22-22005XX	8.00	12.00
M22-22006XX	10.00	14.00
M22-22007XX	12.00	16.00
M22-22008XX	14.00	18.00

PART No.	DIM 'A'	DIM 'B'
M22-22009XX	16.00	20.00
M22-22010XX	18.00	22.00
M22-22011XX	20.00	24.00
M22-22012XX	22.00	26.00
M22-22013XX	24.00	28.00
M22-22014XX	26.00	30.00
M22-22015XX	28.00	32.00

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 9T, UL94V-0

CONTACTS = BRASS

FINISH:

45 = GOLD

46 = 100% TIN

ELECTRICAL:

CURRENT RATING = 2A

VOLTAGE RATING = 100V AC/DC



DIELECTRIC WITHSTANDING = 800V AC MIN

INSULATION RESISTANCE = 1,000 MEGOHMS MIN

ENVIRONMENTAL:

TEMPERATURE RANGE = -25°C TO +85°C

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C018XX (LATEST ISSUE)

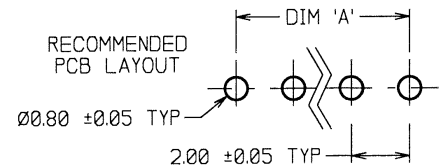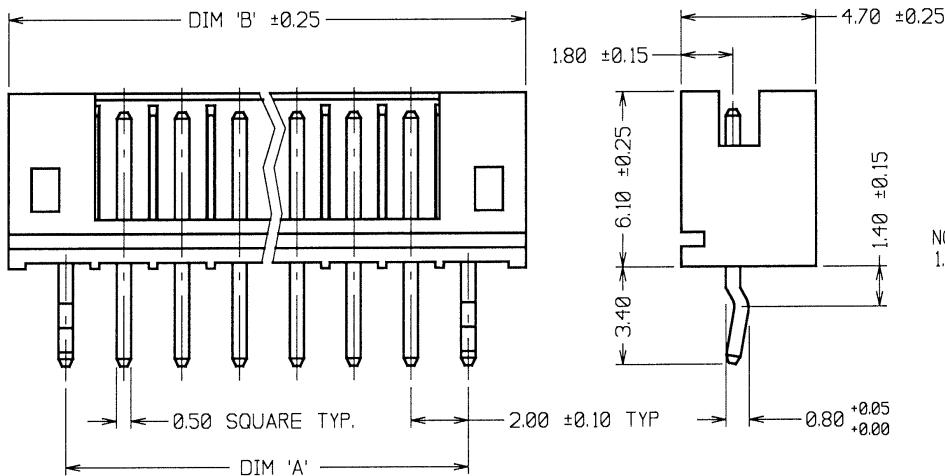

NOTES:

1. ALL TOLERANCES ARE ±0.20 UNLESS OTHERWISE STATED.

ORDER CODE:

M22-220XXXX

No. OF WAYS

02 TO 15

FINISH:

45 = GOLD

46 = 100% TIN

JMB 10 29.06.06 9303

NAME ISS. DATE C/NOTE

APPROVED: J.B.

CHECKED: W.J.B.

DRAWN: W. J. BOURNE

CUSTOMER REF.:

ASSEMBLY DRG:

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

2mm VERTICAL SHROUDED PIN HEADER

DRAWING NUMBER:

M22-220XXXX

SHT
2
OF
2