


Directional Coupler

For RF Applications in Cable TV
Networking Equipment

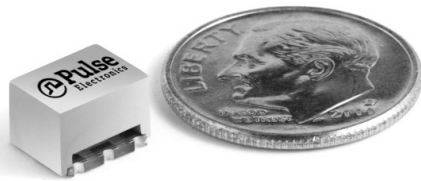

- 16 dB coupling level
- Value-oriented construction
- Operating bandwidth of 5MHz to 900 MHz
- Operating temperature: -40°C to +85°C
- 235°C peak IR reflow temperature rating




Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C

Part Number	Frequency (MHz)	Z (Ω)	Coupling		Mainline Loss		Isolation (dB MIN)	Return Loss	
			Nom. (dB)	Flatness (dB MAX)	TYP (dB)	MAX (dB)		TYP (dB)	MIN (dB)
C3027NL	5 - 900	75	16 +0.4/-0.6	0.6	0.6	1.3	18	22	17

Mechanical

Schematic

C3027NL

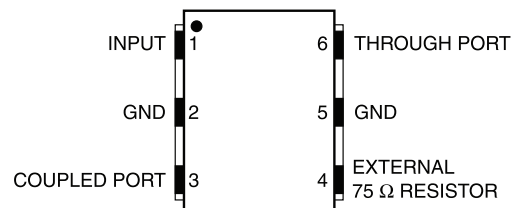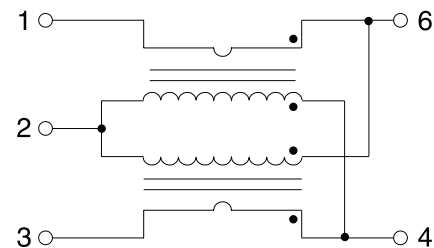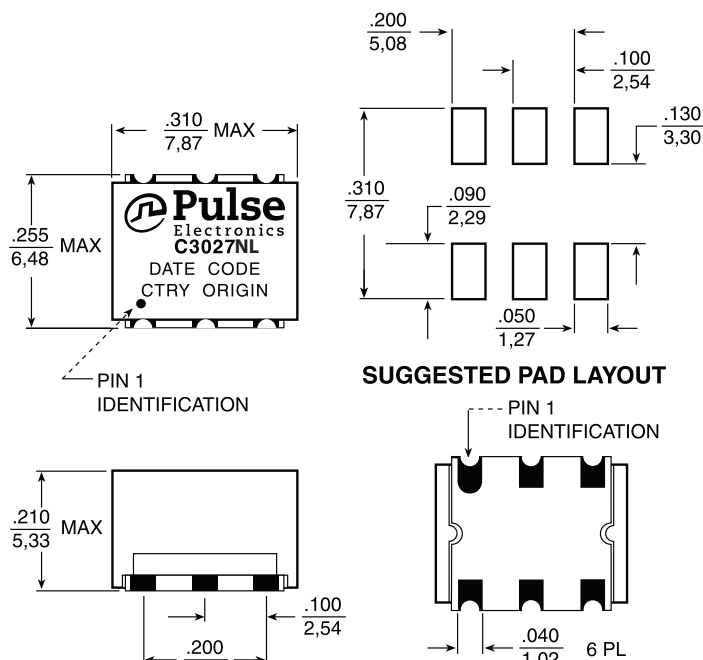

Weight0.35 grams

Tape & Reel850/reel

Tube65/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,13}$

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678


Taiwan 886 3 4356768

Directional Coupler


For RF Applications in Cable TV
Networking Equipment

Typical S-Parameters @ 25°C


MAINLINE (THROUGH PORT)

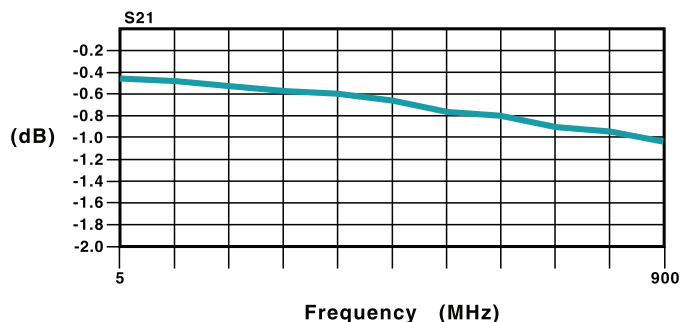


COUPLED PORT

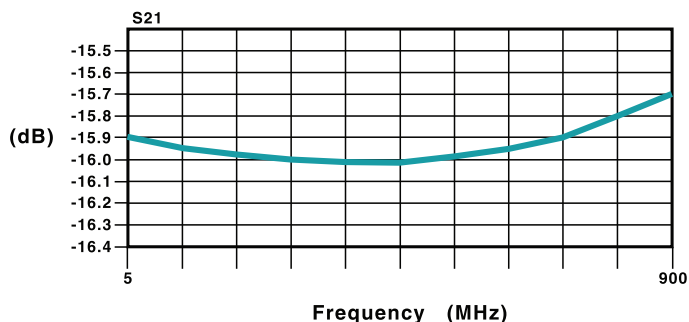


MAINLINE RETURN LOSS

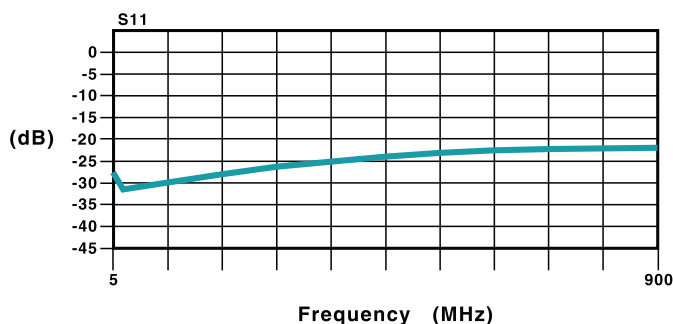

COUPLED PORT RETURN LOSS

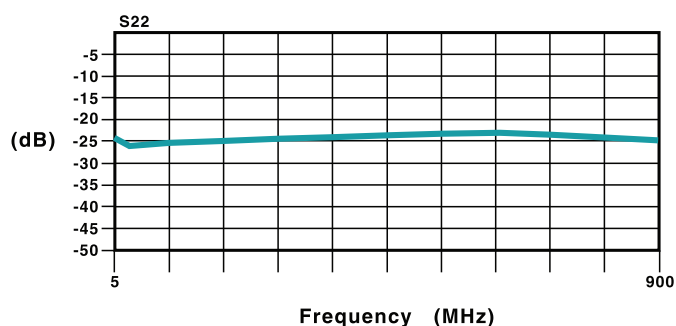

ISOLATION

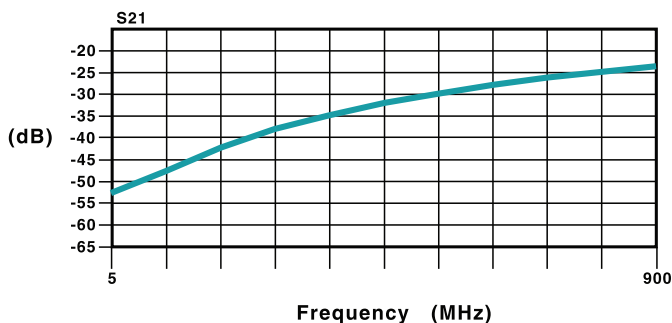

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 15
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.