
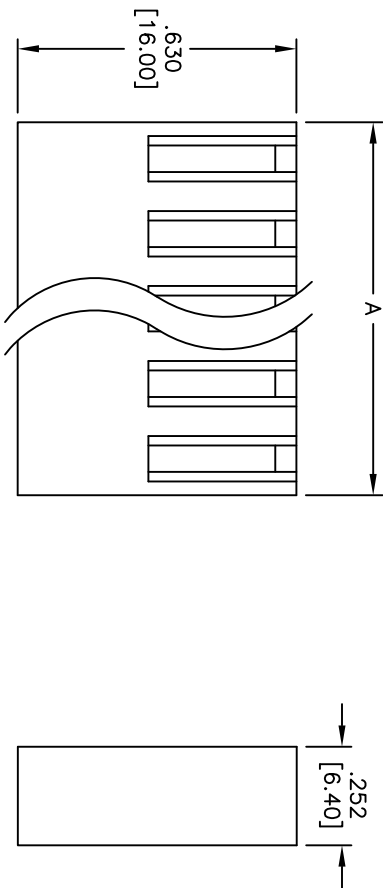


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/27/11	

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

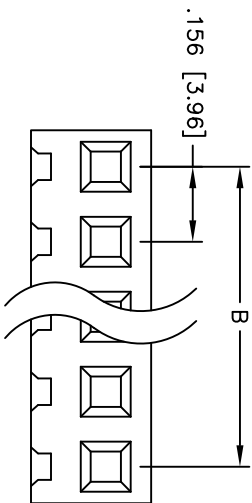

**SPECIFICATIONS:**

Material: Insulator: Nylon 66, rated UL 94V-2  
Insulator color: White  
Electrical: Operating voltage: 250V AC, DC  
Current rating: 7A  
Insulation resistance: 1,000 Mohms min  
Dielectric withstanding voltage: 1,500 VAC for 1 minute  
Temperature Rating: Operating temperature: -40°C to +105°C  
Environmental: Lead free, RoHS compliant



Positions: 2 thru 25  
A = .156 [3.96] x No. of Positions + .028 [0.70]  
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		TITLE	
.X ± .10	ØX ± .10	.156 [3.96] WIRE HOUSING, NO LOCKING RAMP	
.XX ± .020	ØXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS		DATE	
DRAWN	DY	1/27/11	
CHECKED			
APPROVED			
SIZE		PART NO.	
X		MTB-XX-NLR	
REF: S00723T		SCALE: NTS	
		SHEET 1 OF 1	