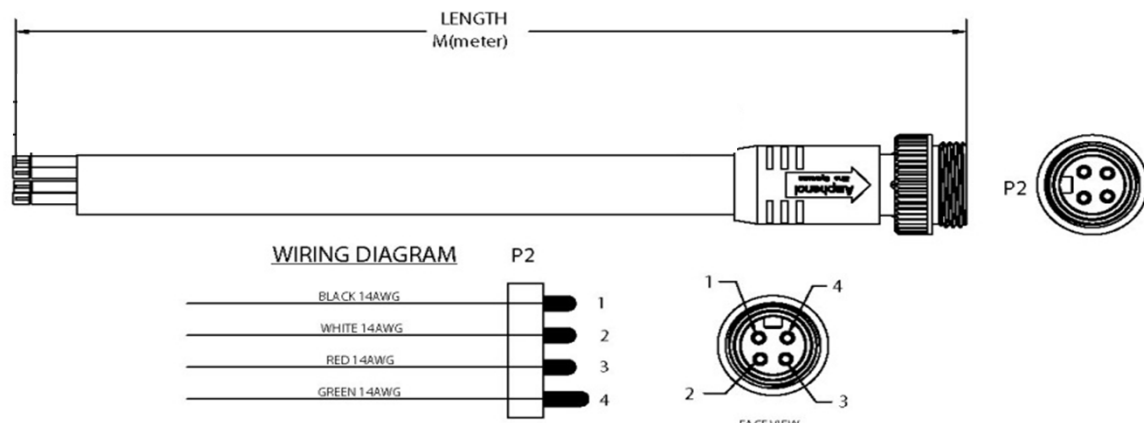


CONFIGURATION		PART NUMBER	LENGTH
PowerBOSSlite Drop Cable Assembly, Molded, 14 Awg, Standard Flex, Connectors - Male Straight Entry, Single Ended		P29016-MXX	AS REQUESTED
DIMENSIONS			
 <p>The diagram illustrates the cable assembly with a dimension line indicating 'LENGTH M(meter)'. Below the cable, a 'WIRING DIAGRAM' shows four conductors: BLACK 14AWG, WHITE 14AWG, RED 14AWG, and GREEN 14AWG, connected to a P2 connector. To the right, a 'FACE VIEW' of the P2 connector shows four pins numbered 1 through 4.</p>			
TECHNICAL DATA			
TEMPERATURE RANGE:	-20C to +90C		
PROTECTION:	IP 67, NEMA 6P		
BODY:	OIL RESISTANT PVC		
CONTACTS:	COPPER ALLOY		
CONTACT PLATING:	GOLD OVER NICKEL PLATING		
CONNECTOR FACE:	PVC BLACK		
AMPERAGE:	15AMP		
COUPLING:	MACHINED ALUMINUM, ANODIZED		
CABLE CHARACTERISTICS:	UL TYPE TC 600V 90°C DRY 75°C WET, EXPOSED RUN (ER) OR MTW 600V 90°C OR STOOW 105°C 600V - CSA STOOW 600V FT2		
APPROVALS:	UL, c(UL)		

Sales and Technical Support 1-800-394-7732

www.sineco.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[P29016-M0.5](#) [P29016-M1](#) [P29016-M1.5](#) [P29016-M2](#) [P29016-M2.5](#) [P29016-M3](#) [P29016-M4](#) [P29016-M5](#) [P29016-M6](#) [P29016-M8](#) [P29016-M10](#) [P29016-M12](#) [P29016-M14](#)