

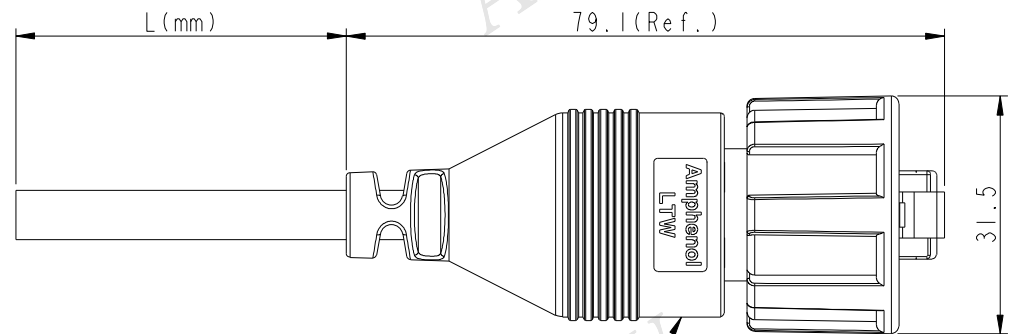


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1670234	2016/07/18	Feng_Li	Add Cable Length Tolerance



ROP-5SAMMM-TLM7000 1

ROP-5SAMMM-TLM7BXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
99: 99Meters

Cable Length(L):01~99Meters

- Note:
- * Waterproof Rate: IP67.
 - * Housing: Nylon, Black.
 - * Plug: PC, Gold Plated, Shielded
 - * Lock Nut: Nylon+GF, Black.
 - * Gasket: Silicone, Black.
 - * Seal: Silicone, Black.
 - * Sealing Nut: Nylon, Black.
 - * Cable: FTP, 24#*4P+MY+D+AL/MY, OD6, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

Drain Wire	接地	Shield
Brown	棕	8
White/Brown	白/棕	7
Green	綠	6
White/Blue	白/藍	5
Blue	藍	4
White/Green	白/綠	3
Orange	橘	2
White/Orange	白/橘	1
Wire Color		Plug
Pin Out		

Twist
對絞
Twist
對絞
Twist
對絞

UNIT:mm		TITLE	RJ45 Plug Cable, ODVA, Cat 5e
TOLERANCE	.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE	1:1
		SIZE	A4
		SHEET	1 OF 1
		REV.	B
		WC-REV.	A.9
		QC	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Feng_Li	2016-07-18
ROP-5SAMMM-TLM7BXX	CHECKED BY	DATE
CUSTOMER	Jinhai	2016-07-18
ALTW	APPROVED BY	DATE
	Jerry	2016-07-18