

M12-Round-Plug Connector According to IEC 61076-2-101 M12-Cordsets


RST-RKT | RST-RKWT




Actuator-/Sensor Double-Ended Cordset, M12, Male to Female Straight and Male to Female 90° 3-, 4- and 5-Pole, yellow PUR, PVC and TPE cable, EURO DC Color Code, IP 68 and NEMA 6P rated.

Cable Types: 18 AWG
731 | 637 = TPE, yellow
645 | 602 = PUR, yellow

Cable Types: 22 AWG
632 | 633 | 612 = PVC, yellow
610 | 679 | 644 = PUR, yellow
643 = TPE, yellow

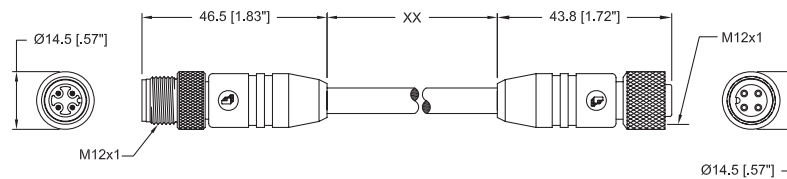

RST 4-RKT 4 - Male to Female Straight

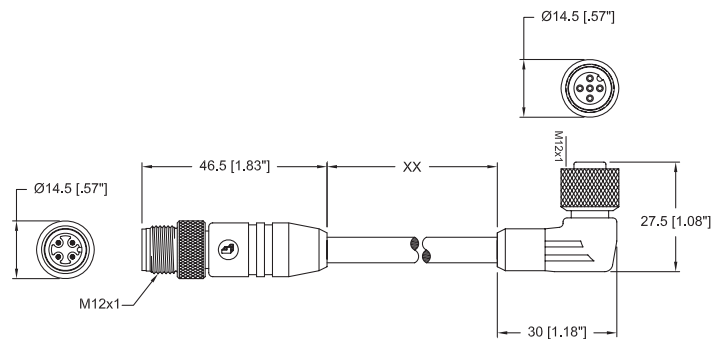

RST 4 - RKWT 4 - Male Straight to Female 90°

Pin Assignments - M12

3-Pole		4-Pole		5-Pole	
1 = brown		1 = brown		1 = brown	
3 = blue		2 = white		2 = white	
4 = black		3 = blue		3 = blue	
		4 = black		4 = black	
				5 = grey	



lumbergautomation

A BELDEN BRAND

Technical Specifications

Materials

Molded Body

Polyurethane,
yellow

Coupling Nut
plated

Brass, nickel

Contacts

Brass, gold plated

Insert

Polyurethane

O-ring

Viton

Electrical

Current Rating

4A

Voltage Rating

250V

Mechanical

Temperature

-40°C To 90°C

Protection

IP 68, NEMA 6P

Part Numbers

RST 3-RKT 4-3-731/0,3 M	RST 4-RKT 4-643/0,3 M
RST 3-RKT 4-3-731/0,6 M	RST 4-RKT 4-643/0,6 M
RST 3-RKT 4-3-731/1 M	RST 4-RKT 4-643/1 M
RST 3-RKT 4-3-731/2 M	RST 4-RKT 4-643/2 M
RST 3-RKT 4-3-731/5 M	RST 4-RKT 4-643/3 M
RST 3-RKT 4-3-632/0,3 M	RST 4-RKT 4-643/5 M
RST 3-RKT 4-3-632/0,6 M	RST 4-RKT 4-602/0,3 M
RST 3-RKT 4-3-632/1 M	RST 4-RKT 4-602/0,6 M
RST 3-RKT 4-3-632/2 M	RST 4-RKT 4-602/1 M
RST 3-RKT 4-3-632/5 M	RST 4-RKT 4-602/2 M
RST 3-RKT 4-3-645/0,3 M	RST 4-RKT 4-602/3 M
RST 3-RKT 4-3-645/0,6 M	RST 4-RKT 4-602/5 M
RST 3-RKT 4-3-645/1 M	RST 4-RKT 4-679/0,3 M
RST 3-RKT 4-3-645/2 M	RST 4-RKT 4-679/0,6 M
RST 3-RKT 4-3-645/5 M	RST 4-RKT 4-679/1 M
RST 3-RKT 4-3-610/0,3 M	RST 4-RKT 4-679/2 M
RST 3-RKT 4-3-610/0,6 M	RST 4-RKT 4-679/3 M
RST 3-RKT 4-3-610/1 M	RST 4-RKT 4-679/5 M
RST 3-RKT 4-3-610/2 M	RST 5-RKT 5-612/0,3 M
RST 3-RKT 4-3-610/5 M	RST 5-RKT 5-612/0,6 M
RST 4-RKT 4-637/0,3 M	RST 5-RKT 5-612/1 M
RST 4-RKT 4-637/0,6 M	RST 5-RKT 5-612/2 M
RST 4-RKT 4-637/1 M	RST 5-RKT 5-612/5 M
RST 4-RKT 4-637/2 M	RST 5-RKT 5-644/0,3 M
RST 4-RKT 4-637/3 M	RST 5-RKT 5-644/0,6 M
RST 4-RKT 4-637/5 M	RST 5-RKT 5-644/1 M
RST 4-RKT 4-633/0,3 M	RST 5-RKT 5-644/2 M
RST 4-RKT 4-633/0,6 M	RST 5-RKT 5-644/5 M
RST 4-RKT 4-633/1 M	
RST 4-RKT 4-633/2 M	
RST 4-RKT 4-633/3 M	
RST 4-RKT 4-633/5 M	

Part Numbers

RST 3-RKWT 4-3-731/0,3 M	RST 4-RKWT 4-643/0,3 M
RST 3-RKWT 4-3-731/0,6 M	RST 4-RKWT 4-643/0,6 M
RST 3-RKWT 4-3-731/1 M	RST 4-RKWT 4-643/1 M
RST 3-RKWT 4-3-731/2 M	RST 4-RKWT 4-643/2 M
RST 3-RKWT 4-3-731/5 M	RST 4-RKWT 4-643/3 M
RST 3-RKWT 4-3-632/0,3 M	RST 4-RKWT 4-643/5 M
RST 3-RKWT 4-3-632/0,6 M	RST 4-RKWT 4-602/0,3 M
RST 3-RKWT 4-3-632/1 M	RST 4-RKWT 4-602/0,6 M
RST 3-RKWT 4-3-632/2 M	RST 4-RKWT 4-602/1 M
RST 3-RKWT 4-3-632/5 M	RST 4-RKWT 4-602/2 M
RST 3-RKWT 4-3-645/0,3 M	RST 4-RKWT 4-602/3 M
RST 3-RKWT 4-3-645/0,6 M	RST 4-RKWT 4-602/5 M
RST 3-RKWT 4-3-645/1 M	RST 4-RKWT 4-679/0,3 M
RST 3-RKWT 4-3-645/2 M	RST 4-RKWT 4-679/0,6 M
RST 3-RKWT 4-3-645/5 M	RST 4-RKWT 4-679/1 M
RST 3-RKWT 4-3-610/0,3 M	RST 4-RKWT 4-679/2 M
RST 3-RKWT 4-3-610/0,6 M	RST 4-RKWT 4-679/3 M
RST 3-RKWT 4-3-610/1 M	RST 4-RKWT 4-679/5 M
RST 3-RKWT 4-3-610/2 M	RST 5-RKWT 5-612/0,3 M
RST 3-RKWT 4-3-610/5 M	RST 5-RKWT 5-612/0,6 M
RST 4-RKWT 4-637/0,3 M	RST 5-RKWT 5-612/1 M
RST 4-RKWT 4-637/0,6 M	RST 5-RKWT 5-612/2 M
RST 4-RKWT 4-637/1 M	RST 5-RKWT 5-612/5 M
RST 4-RKWT 4-637/2 M	RST 5-RKWT 5-644/0,3 M
RST 4-RKWT 4-637/3 M	RST 5-RKWT 5-644/0,6 M
RST 4-RKWT 4-637/5 M	RST 5-RKWT 5-644/1 M
RST 4-RKWT 4-633/0,3 M	RST 5-RKWT 5-644/2 M
RST 4-RKWT 4-633/0,6 M	RST 5-RKWT 5-644/5 M
RST 4-RKWT 4-633/1 M	
RST 4-RKWT 4-633/2 M	
RST 4-RKWT 4-633/3 M	
RST 4-RKWT 4-633/5 M	

Cable Specifications

Poles	Cable No.	Material	Gauge	Jacket Color	Overall Diameter	UL Recognition
3	610	PUR	22	Yellow	.190"	AWM 20233
	632	PVC	22	Yellow	.190"	AWM 2661
	645	PUR	18	Yellow	.220"	AWM 20233
	731	TPE	18	Yellow	.261"	AWM 20327, PLTC
4	602	PUR	18	Yellow	.230"	AWM 20233
	633	PVC	22	Yellow	.190"	AWM 2661
	637	TPE	18	Yellow	.280"	AWM 20327, PLTC
	643	TPE	22	Yellow	.246"	AWM 20327, PLTC
	679	PUR	22	Yellow	.190"	AWM 20233
5	612	PVC	22	Yellow	.210"	AWM 2661
	644	PUR	22	Yellow	.210"	AWM 20233