

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 769944

*RoHS COMPLIANT



BOURNS®

Features

- 6 mm Round / Single-Turn / Cermet Industrial / Open Frame
- Cross slot adjustment options
- Horizontal and vertical mounting styles
- Dust resistant/splash resistant covers
- PC board stand-offs and retention feature

- Front and top adjust styles
- RoHS compliant*

3306 - 6 mm Round Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range
.....100 ohms to 1 megohm
(see standard resistance table)
Resistance Tolerance±25 % std.
(tighter tolerance available)
Absolute Minimum Resistance
.....2 % max. ($\leq 2K = 30$ ohms)
Contact Resistance Variation .3 % max.
Resolution.....Essentially infinite
Adjustment Angle215 ° nom.

Environmental Characteristics

Power Rating (100 volts max.)
70 °C0.2 watt
Temperature Range-25 °C to +100 °C
Temperature Coefficient±250 ppm/°C
Load Life...1,000 hours 0.2 watt @ 70 °C
(5 % ΔTR)

Physical Characteristics

Mechanical Angle.....260 ° ±20 °
Torque (Operating).....4.5 oz-in. max.
Stop Strength.....6.5 oz-in. min.
Terminals.....Solderable pins
MarkingManufacturer's
trademark, resistance code
Standard Packaging300 pcs. per bag
Adjustment ToolH-90
Aqueous cleaning not recommended

How To Order

3306 W - 1 - 103


Model _____
Style _____
Standard Product _____
Resistance Code _____

Standard Resistance Table


Resistance (Ohms)	Resistance Code
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105

Popular distribution resistance values listed in boldface.


Top Adjust Common Dimensions

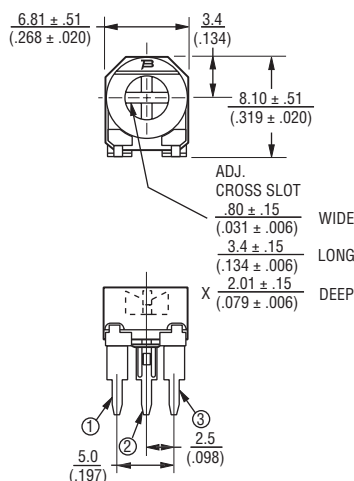


3306W




3306P




SUGGESTED PWB LAYOUT - STYLE F

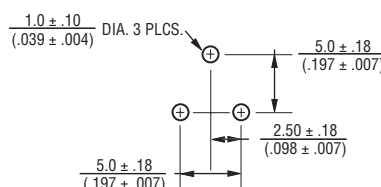


Side Adjust Common Dimensions

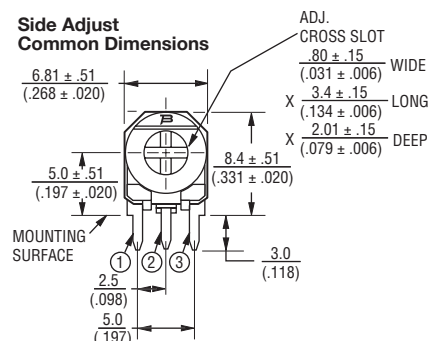



3306W



3306K



SUGGESTED PWB LAYOUT - STYLES K, P, W



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: $\frac{\text{MM}}{(\text{INCHES})}$