



1500W Single Output Power Supply

SE-1500 series



■ Features :

- AC input 180 ~ 264VAC
- AC input active surge current limiting
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC ball bearing fan
- High power density 7.8w/inch³
- With DC OK signal output
- Built-in remote ON-OFF control
- Built-in remote sense function
- UL / CUL approved
- Low cost
- 2 years warranty




SPECIFICATION

MODEL		SE-1500-5	SE-1500-12	SE-1500-15	SE-1500-24	SE-1500-27	SE-1500-48
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	27V	48V
	RATED CURRENT	300A	125A	100A	62.5A	55.6A	31.3A
	CURRENT RANGE	0 ~ 300A	0 ~ 125A	0 ~ 100A	0 ~ 62.5A	0 ~ 55.6A	0 ~ 31.3A
	RATED POWER	1500W	1500W	1500W	1500W	1501.2W	1502.4W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	3.3 ~ 5.5V	10.8 ~ 13.5V	13.5 ~ 16.5V	21.6 ~ 26.4V	25 ~ 30V	43.2 ~ 56V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	150ms, 12ms / 230VAC at full load					
	HOLD UP TIME (Typ.)	26ms / 230VAC at full load					
INPUT	VOLTAGE RANGE	180 ~ 264VAC 254 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	81%	85%	85%	87%	88%	89%
	AC CURRENT (Typ.)	17.5A / 230VAC					
	INRUSH CURRENT (Typ.)	60A / 230VAC					
	LEAKAGE CURRENT	<3.5mA / 240VAC					
PROTECTION	OVERLOAD	105 ~ 125% rated output power Protection type : Shut down o/p voltage, re-power on to recover					
	OVER VOLTAGE	5.75 ~ 6.75V	14.5 ~ 16.2V	18 ~ 21V	27.6 ~ 32.4V	31 ~ 35V	57.6 ~ 67.2V
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	95℃±5℃ (5V), 85℃±5℃ (12V,15V), 80℃±5℃ (24V), 75℃±5℃ (27V,48V) (TSW1) detect on heatsink of o/p diode Protection type : Shut down o/p voltage, recovers automatically after temperature goes down					
FUNCTION	DC_OK SIGNAL	PSU turn on:3.3V ~ 5.6V PUS turn off:0 ~ 1V					
	REMOTE CONTROL	RC+/RC-: 0 ~ 0.8V power on; 4 ~ 10V power off					
ENVIRONMENT	WORKING TEMP.	-20 ~ +70℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.05%/℃ (0 ~ 50℃)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC	SAFETY STANDARDS	UL60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH					
OTHERS	MTBF	134.5K hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	278*177.8*63.5mm (L*W*H)					
	PACKING	3.3Kg; 4pcs/14.2Kg/1.14CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation.						

Mechanical Specification

Case No.982A Unit:mm

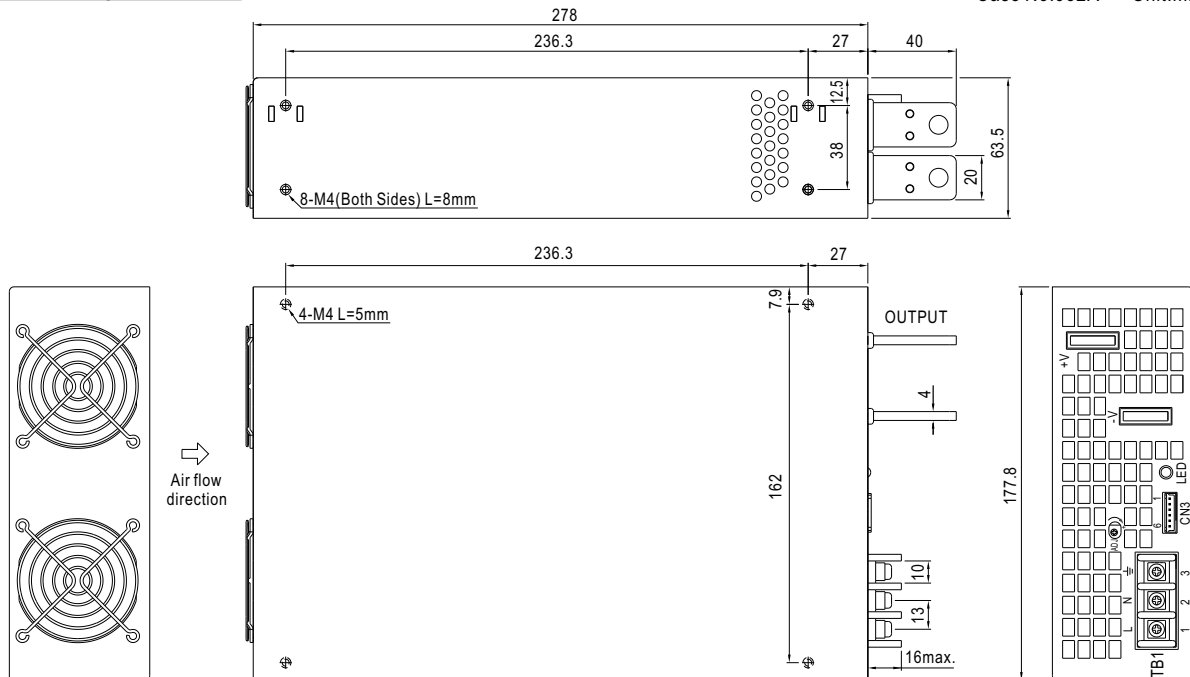


Terminal Pin No. Assignment :

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG $\perp$


Control Pin (CN3) : JST B6B-XH or equivalent

Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	DC_OK Signal	4	+S	JST XHP or equivalent	JST SXH-001T or equivalent
2	DC_OK GND	5	RC-		
3	-S	6	RC+		


Block Diagram

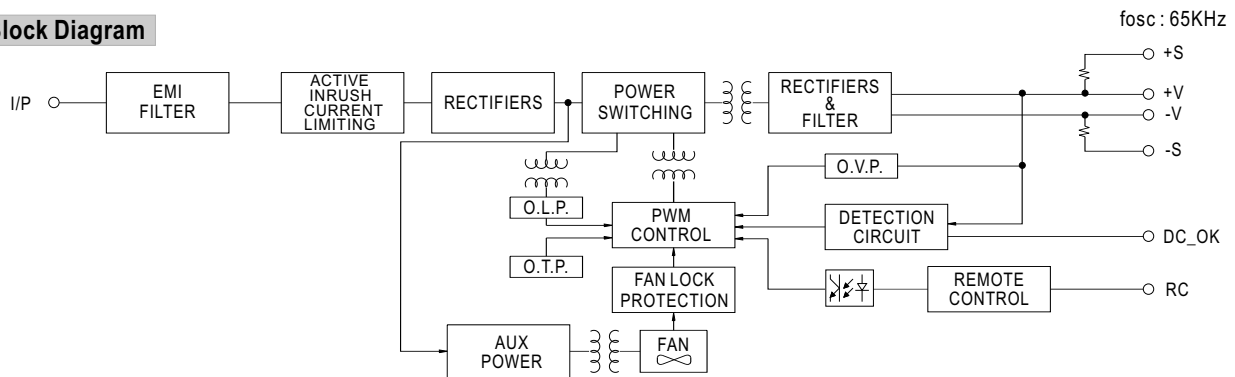

Derating Curve

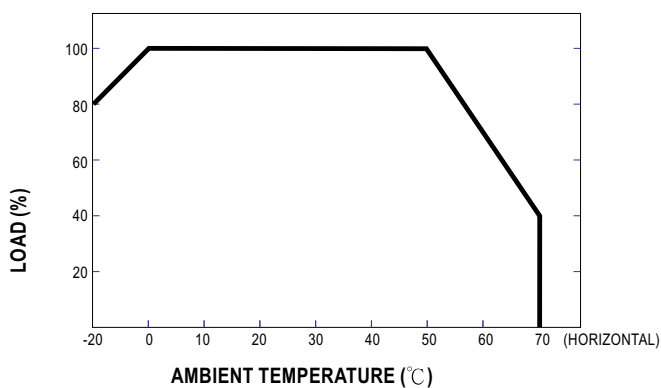

Static Characteristics

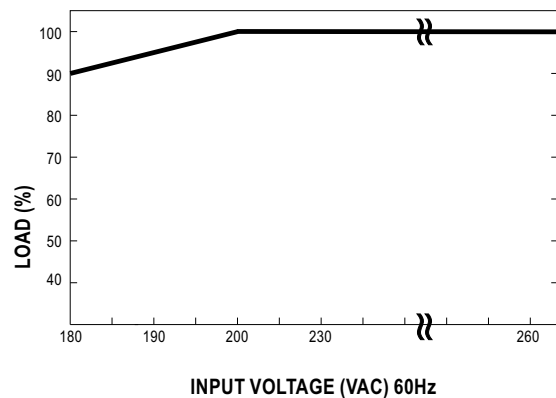

Function Description of CN3


Pin No.	Function	Description
1	DC_OK	DC_OK signal is a TTL level signal, referenced to pin2(DC_OK GND). "High" when PSU turns on.
2	GND	This pin connects to the negative terminal (-V). Return for DC_OK signal output.
3	-S	Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect.
4	+S	Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect.
5	RC-	Return for RC+ signal input.
6	RC+	Turns the output on and off by electrical or dry contact between pin 6 (RC+) and pin 5 (RC-). 0~0.8V: Power ON, 4~10V: Power OFF.

Function Manual

1.DC_OK Signal

DC_OK Signal is a TTL level signal. "High" when PSU turns on.


Between DC_OK(pin1) and GND(pin2)	Output Status
3.3 ~ 5.6V	ON
0 ~ 1V	OFF

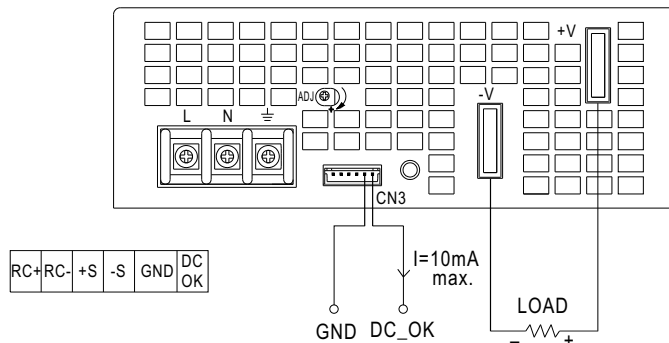


2. Remote Control

The PSU can be turned ON/OFF by using the "Remote Control" function.

Between RC+(pin6) and RC-(pin5)	Output Status
SW OFF (0 ~ 0.8V)	ON
SW ON (4 ~ 10V)	OFF

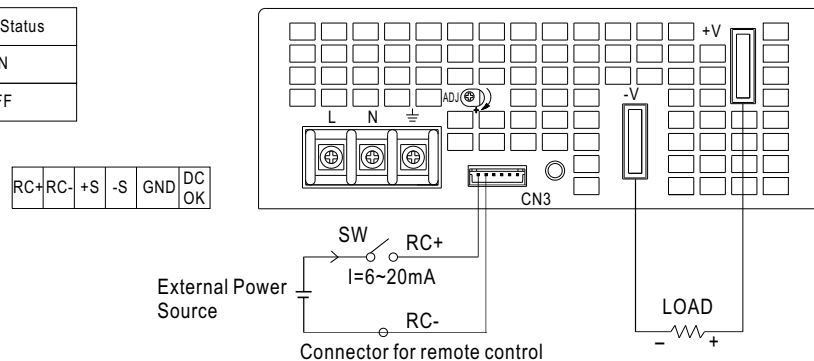

3. Remote Sense

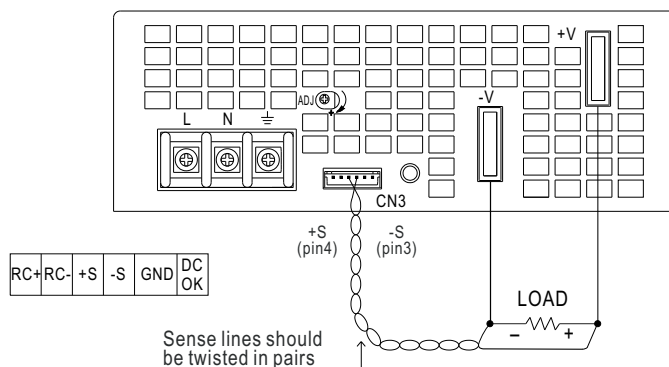

MODEL : SE-1500-5

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	RIPPLE & NOISE	V1 : 150 mVp-p (Max)	I/P : 230VAC O/P : FULL LOAD Ta : 25°C	V1 : 113 mVp-p (Max)	P
2	OUTPUT VOLTAGE ADJUST RANGE	CH1 : 3.3V~ 5.5V	I/P : 230 VAC I/P : 200 VAC O/P : MIN LOAD Ta : 25°C	3.202 V~ 5.715 V/ 230 VAC 3.199 V~ 5.715 V/ 200VAC	P
3	OUTPUT VOLTAGE TOLERANCE	V1 : 2 %~ -2 % (Max)	I/P : 200 VAC / 264 VAC O/P : FULL/ MIN LOAD Ta : 25°C	V1 : 0.2 %~ -0.2 %	P
4	LINE REGULATION	V1 : 0.5 %~ -0.5 % (Max)	I/P : 200VAC ~ 264 VAC O/P : FULL LOAD Ta : 25°C	V1 : 0.13 %~ -0.13 %	P
5	LOAD REGULATION	V1 : 2 %~ -2 % (Max)	I/P : 230 VAC O/P : FULL ~MIN LOAD Ta : 25°C	V1 : 0.13 %~ -0.13 %	P
6	SET UP TIME	230VAC : 150 ms (Max)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 65 ms	P
7	RISE TIME	230VAC : 12 ms (Max)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 5 ms	P
8	HOLD UP TIME	230VAC : 26 ms (TYP)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 33 ms	P
9	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	TEST : < 5 %	P
10	DYNAMIC LOAD	V1 : 1000 mVp-p	I/P : 230 VAC O/P : FULL /Min LOAD 90%DUTY/ 1KHZ Ta : 25°C	544 mVp-p	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	INPUT VOLTAGE RANGE	180VAC~264 VAC)	I/P : TESTING O/P : FULL LOAD Ta : 25°C	167 V~264V	P
			I/P : LOW-LINE-3V= 177 V HIGH-LINE+15%=300 V O/P : FULL/MIN LOAD ON : 30 <u>Sec</u> . OFF : 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST : OK	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE OSC	I/P : 180VAC ~ 264 VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK	P
3	EFFICIENCY	81 % (TYP)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	83.4 %	P
4	INPUT CURRENT	230V/ 17.5 A	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I = 12.4 A/230 VAC	P
5	INRUSH CURRENT	230V/ 60 A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I = 50 A/230V AC	P
6	LEAKAGE CURRENT	< 3.5 mA / 240 VAC	I/P : 264 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.56 mA N-FG : 0.56 mA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	OVER LOAD PROTECTION	105 %~ 125 %	I/P : 230 VAC I/P : 200 VAC O/P : TESTING Ta : 25°C	115%/ 230 VAC 115%/ 200 VAC Shut down Re-power ON	P
2	OVER VOLTAGE PROTECTION	CH1 : 5.75 V~ 6.75 V	I/P : 230 VAC I/P : 200 VAC O/P : MIN LOAD Ta : 25°C	6.10 V/ 230 VAC 6.08V/ 200 VAC Shut down Re- power ON	P
3	OVER TEMPERATURE PROTECTION	SPEC : TSW1 : 95°C± 5°C O.T.P. NO DAMAGE	I/P : 230 VAC O/P : FULL LOAD	O.T.P. Active Shut down o/p voltage , recovers automatically after temperature goes down	P
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P : 264 VAC O/P : FULL LOAD Ta : 25°C	NO DAMAGE Shut down Re-power ON	P

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	FAN LOCK TEST	POWER SUPPLY SHUT DOWN	I/P : 230 VAC O/P : FULL LOAD	OK	P
3	REMOTE CONTROL	Rc+ / Rc- 0V~ 0.8V POWER ON 4V~10V POWER OFF	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	0V ~ 1.8 V POWER ON 1.9V~ 10 V POWER OFF	P
4	DC OK SIGNAL	POWER ON : 3.3V~5.6V POWER OFF : 0V~1V	I/P : 230 VAC O/P : FULL LOAD/NO LOAD Ta : 25°C	POWER ON : 5.24 V POWER OFF : 0 V	P
5	REMOTE SENSE	>0.25V	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	➤ 0.25 V	P

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT																																																																																																																																																																																				
1	TEMPERATURE RISE TEST	MODEL : SE-1500-5 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 32 °C 2. HIGH AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 46.6 °C <table><tr><th>NO</th><th>Position</th><th>P/N</th><th>ROOM AMBIENT Ta= 32 °C</th><th>HIGH AMBIENT Ta= 46.6 °C</th></tr><tr><td>1</td><td>LF2</td><td>TR-862</td><td>57.8°C</td><td>70.7°C</td></tr><tr><td>2</td><td>RY1</td><td>PCFN-112D2M</td><td>52.2°C</td><td>62.0°C</td></tr><tr><td>3</td><td>BD1</td><td>US30KB80R 30A/800V</td><td>69.1°C</td><td>82.2°C</td></tr><tr><td>4</td><td>C5</td><td>560U/400V</td><td>44.6°C</td><td>56.1°C</td></tr><tr><td>5</td><td>T3</td><td>TF-1694</td><td>48.6°C</td><td>61.8°C</td></tr><tr><td>6</td><td>C154</td><td>220U/25V 105°C KY</td><td>61.3°C</td><td>74.0°C</td></tr><tr><td>7</td><td>Q903</td><td>IRGP20B60PDPbF 20A/600V</td><td>68.6°C</td><td>81.9°C</td></tr><tr><td>8</td><td>T4</td><td>TF1458</td><td>41.0°C</td><td>56.0°C</td></tr><tr><td>9</td><td>U150</td><td>SG3525AN</td><td>58.1°C</td><td>71.1°C</td></tr><tr><td>10</td><td>C157</td><td>47U/35V 105°C ZLH</td><td>58.4°C</td><td>70.8°C</td></tr><tr><td>11</td><td>C158</td><td>47U/35V 105°C ZLH</td><td>53.6°C</td><td>66.5°C</td></tr><tr><td>12</td><td>T2</td><td>TF-1832A</td><td>52.0°C</td><td>66.1°C</td></tr><tr><td>13</td><td>T1</td><td>TF-1654</td><td>49.6°C</td><td>64.2°C</td></tr><tr><td>14</td><td>D106</td><td>S60SC4MT 60A/40V</td><td>63.4°C</td><td>77.4°C</td></tr><tr><td>15</td><td>D111</td><td>S60SC4MT 60A/40V</td><td>79.8°C</td><td>94.0°C</td></tr><tr><td>16</td><td>D100</td><td>S60SC4MT 60A/40V</td><td>50.9°C</td><td>66.6°C</td></tr><tr><td>17</td><td>D103</td><td>S60SC4MT 60A/40V</td><td>66.0°C</td><td>81.3°C</td></tr><tr><td>18</td><td>L103</td><td>TR809</td><td>51.9°C</td><td>67.1°C</td></tr><tr><td>19</td><td>L104</td><td>TR809</td><td>68.0°C</td><td>83.3°C</td></tr><tr><td>20</td><td>L101</td><td>TR809</td><td>57.3°C</td><td>73.4°C</td></tr><tr><td>21</td><td>L102</td><td>TR809</td><td>59.1°C</td><td>75.3°C</td></tr><tr><td>22</td><td>C111</td><td>4700u/10V 10Kh 12.5*30 ZLH</td><td>49.0°C</td><td>64.3°C</td></tr><tr><td>23</td><td>C114</td><td>4700u/10V UL10Kh ZLH</td><td>48.9°C</td><td>63.5°C</td></tr><tr><td>24</td><td>C119</td><td>4700u/10V UL10Kh ZLH</td><td>58.0°C</td><td>73.3°C</td></tr><tr><td>25</td><td>U6</td><td>TNY280PN</td><td>64.9°C</td><td>77.2°C</td></tr><tr><td>26</td><td>T5</td><td>TF1838</td><td>62.6°C</td><td>76.0°C</td></tr><tr><td>27</td><td>C159</td><td>220u/25V UL7Kh 8*11.5 KY</td><td>32.8°C</td><td>45.9°C</td></tr><tr><td>28</td><td>C160</td><td>47u/35V L6Kh 5*11 ZLH</td><td>32.4°C</td><td>45.5°C</td></tr><tr><td>29</td><td>C162</td><td>47u/35V L6Kh 5*11 ZLH</td><td>32.8°C</td><td>45.8°C</td></tr><tr><td>30</td><td>C301</td><td>220u/25V UL7Kh KY</td><td>64.1°C</td><td>76.8°C</td></tr><tr><td>31</td><td>C75</td><td>100u/25V L5Kh 6.3*11 KY</td><td>57.3°C</td><td>69.1°C</td></tr><tr><td>32</td><td>TSW1</td><td>ST-85°C</td><td>76.1°C</td><td>89.7°C</td></tr><tr><td>33</td><td>Q900</td><td>IRGP20B60PDPbF 20A/600V</td><td>58.1°C</td><td>71.1°C</td></tr><tr><td>34</td><td>C167</td><td>220u/25V UL7Kh 8*11.5 KY</td><td>66.0°C</td><td>80.1°C</td></tr><tr><td>35</td><td>C11</td><td>C/MPE 225/450V MMX</td><td>50.0°C</td><td>61.6°C</td></tr></table>			NO	Position	P/N	ROOM AMBIENT Ta= 32 °C	HIGH AMBIENT Ta= 46.6 °C	1	LF2	TR-862	57.8°C	70.7°C	2	RY1	PCFN-112D2M	52.2°C	62.0°C	3	BD1	US30KB80R 30A/800V	69.1°C	82.2°C	4	C5	560U/400V	44.6°C	56.1°C	5	T3	TF-1694	48.6°C	61.8°C	6	C154	220U/25V 105°C KY	61.3°C	74.0°C	7	Q903	IRGP20B60PDPbF 20A/600V	68.6°C	81.9°C	8	T4	TF1458	41.0°C	56.0°C	9	U150	SG3525AN	58.1°C	71.1°C	10	C157	47U/35V 105°C ZLH	58.4°C	70.8°C	11	C158	47U/35V 105°C ZLH	53.6°C	66.5°C	12	T2	TF-1832A	52.0°C	66.1°C	13	T1	TF-1654	49.6°C	64.2°C	14	D106	S60SC4MT 60A/40V	63.4°C	77.4°C	15	D111	S60SC4MT 60A/40V	79.8°C	94.0°C	16	D100	S60SC4MT 60A/40V	50.9°C	66.6°C	17	D103	S60SC4MT 60A/40V	66.0°C	81.3°C	18	L103	TR809	51.9°C	67.1°C	19	L104	TR809	68.0°C	83.3°C	20	L101	TR809	57.3°C	73.4°C	21	L102	TR809	59.1°C	75.3°C	22	C111	4700u/10V 10Kh 12.5*30 ZLH	49.0°C	64.3°C	23	C114	4700u/10V UL10Kh ZLH	48.9°C	63.5°C	24	C119	4700u/10V UL10Kh ZLH	58.0°C	73.3°C	25	U6	TNY280PN	64.9°C	77.2°C	26	T5	TF1838	62.6°C	76.0°C	27	C159	220u/25V UL7Kh 8*11.5 KY	32.8°C	45.9°C	28	C160	47u/35V L6Kh 5*11 ZLH	32.4°C	45.5°C	29	C162	47u/35V L6Kh 5*11 ZLH	32.8°C	45.8°C	30	C301	220u/25V UL7Kh KY	64.1°C	76.8°C	31	C75	100u/25V L5Kh 6.3*11 KY	57.3°C	69.1°C	32	TSW1	ST-85°C	76.1°C	89.7°C	33	Q900	IRGP20B60PDPbF 20A/600V	58.1°C	71.1°C	34	C167	220u/25V UL7Kh 8*11.5 KY	66.0°C	80.1°C	35	C11	C/MPE 225/450V MMX	50.0°C	61.6°C	P
NO	Position	P/N	ROOM AMBIENT Ta= 32 °C	HIGH AMBIENT Ta= 46.6 °C																																																																																																																																																																																					
1	LF2	TR-862	57.8°C	70.7°C																																																																																																																																																																																					
2	RY1	PCFN-112D2M	52.2°C	62.0°C																																																																																																																																																																																					
3	BD1	US30KB80R 30A/800V	69.1°C	82.2°C																																																																																																																																																																																					
4	C5	560U/400V	44.6°C	56.1°C																																																																																																																																																																																					
5	T3	TF-1694	48.6°C	61.8°C																																																																																																																																																																																					
6	C154	220U/25V 105°C KY	61.3°C	74.0°C																																																																																																																																																																																					
7	Q903	IRGP20B60PDPbF 20A/600V	68.6°C	81.9°C																																																																																																																																																																																					
8	T4	TF1458	41.0°C	56.0°C																																																																																																																																																																																					
9	U150	SG3525AN	58.1°C	71.1°C																																																																																																																																																																																					
10	C157	47U/35V 105°C ZLH	58.4°C	70.8°C																																																																																																																																																																																					
11	C158	47U/35V 105°C ZLH	53.6°C	66.5°C																																																																																																																																																																																					
12	T2	TF-1832A	52.0°C	66.1°C																																																																																																																																																																																					
13	T1	TF-1654	49.6°C	64.2°C																																																																																																																																																																																					
14	D106	S60SC4MT 60A/40V	63.4°C	77.4°C																																																																																																																																																																																					
15	D111	S60SC4MT 60A/40V	79.8°C	94.0°C																																																																																																																																																																																					
16	D100	S60SC4MT 60A/40V	50.9°C	66.6°C																																																																																																																																																																																					
17	D103	S60SC4MT 60A/40V	66.0°C	81.3°C																																																																																																																																																																																					
18	L103	TR809	51.9°C	67.1°C																																																																																																																																																																																					
19	L104	TR809	68.0°C	83.3°C																																																																																																																																																																																					
20	L101	TR809	57.3°C	73.4°C																																																																																																																																																																																					
21	L102	TR809	59.1°C	75.3°C																																																																																																																																																																																					
22	C111	4700u/10V 10Kh 12.5*30 ZLH	49.0°C	64.3°C																																																																																																																																																																																					
23	C114	4700u/10V UL10Kh ZLH	48.9°C	63.5°C																																																																																																																																																																																					
24	C119	4700u/10V UL10Kh ZLH	58.0°C	73.3°C																																																																																																																																																																																					
25	U6	TNY280PN	64.9°C	77.2°C																																																																																																																																																																																					
26	T5	TF1838	62.6°C	76.0°C																																																																																																																																																																																					
27	C159	220u/25V UL7Kh 8*11.5 KY	32.8°C	45.9°C																																																																																																																																																																																					
28	C160	47u/35V L6Kh 5*11 ZLH	32.4°C	45.5°C																																																																																																																																																																																					
29	C162	47u/35V L6Kh 5*11 ZLH	32.8°C	45.8°C																																																																																																																																																																																					
30	C301	220u/25V UL7Kh KY	64.1°C	76.8°C																																																																																																																																																																																					
31	C75	100u/25V L5Kh 6.3*11 KY	57.3°C	69.1°C																																																																																																																																																																																					
32	TSW1	ST-85°C	76.1°C	89.7°C																																																																																																																																																																																					
33	Q900	IRGP20B60PDPbF 20A/600V	58.1°C	71.1°C																																																																																																																																																																																					
34	C167	220u/25V UL7Kh 8*11.5 KY	66.0°C	80.1°C																																																																																																																																																																																					
35	C11	C/MPE 225/450V MMX	50.0°C	61.6°C																																																																																																																																																																																					
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 114 % LOAD Ta : 25°C	TEST : OK	P																																																																																																																																																																																				
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 230 VAC O/P : 100 % LOAD Ta= -25 °C	TEST : OK	P																																																																																																																																																																																				

4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK	P
5	TEMPERATURE COEFFICIENT	± 0.05 %(0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.028 %(0~50°C)	P
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 2G (5) Test Time : 1 hour in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK	P

M.T.B.F & LIFE CYCLE CALCULATION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	CAPACITOR LIFE CYCLE	SE-1500-5 : SUPPOSE C111 IS THE MOST CRITICAL COMPONENT I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME= 869841 HRS I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME= 146500 HRS			P
2	MTBF	MIL-HDBK-217F NOTICES2 PARTS COUNT TOTAL FAILURE RATE : 134.5 K HRS			P

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P : 3 KVAC/min I/P-FG : 1.5 KVAC/min O/P-FG : 0.5 KVAC/min	I/P-O/P : 3.6 KVAC/min I/P-FG : 1.8 KVAC/min O/P-FG : 0.6 KVAC/min Ta : 25°C	I/P-O/P : 7.86 mA I/P-FG : 6.07 mA O/P-FG : 7.59 mA NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P : 500 VDC I/P-FG : 500 VDC O/P-FG : 500 VDC Ta : 25°C	I/P-O/P : 4.33 GΩ I/P-FG : 5.11 GΩ O/P-FG : 10.8 GΩ NO DAMAGE	P
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta : 25°C	16 mΩ	P
4	APPROVAL	TUV : Certificate NO : UL : File NO : E183223			P

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	CONDUCTION	EN55022 EN55011 CLASS B	I/P : 230 VAC (50HZ)/115V(60HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab	P
2	RADIATION	EN55022 EN55011 CLASS B	I/P : 230 VAC (50HZ)/115V(60HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab	P

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q900 Rated IRGP20B60PDPbF 20A/600V	I/P : High-Line +3V = 267 V O/P : (1)Full Load Turn on (2) Full Load (3)Output Short Ta : 25°C	(1) 418 V (2) 398 V (3) 414 V	P
2	Diode Peak Voltage	D100 Rated S60SC4MT 60A/40V	I/P : High-Line +3V = 267 V O/P : (1)Full Load Turn on (2) Full Load (3)Output Short Ta : 25°C	(1) 28.6 V (2) 28.4 V (3) 29.8 V	P
3	Input Capacitor Voltage	C5 Rated 560u/400V 85°C SMQ	I/P : High-Line +3V = 267 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 350.2 V (2) 384.2 V (3) 383.9 V	P
4	Control IC Voltage Test	U150 Rated SG3525AN : 8V~ 40 V	I/P : High-Line +3V = 267 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 12.723 V (2) 12.724 V (3) 12.725 V	P

DATE	SAMPLE	TEST RESULT	TESTER	APPROVAL
2008/12/22	RD SAMPLE	PASS	SANFORD SU	VINCENT TSENG
2009/3/11	PRODUCT SAMPLE W0901A26	PASS	SANFORD SU	VINCENT TSENG
2009/5/5	PRODUCT SAMPLE W093C24	PASS	SANFORD SU	VINCENT TSENG

2003/12/12 A50-F023